

MR16 RETROFIT DOWNLIGHT SERIES (7W TO 9W)



This patented energy efficient MR16 retrofit LED downlight has been designed as a DIY upgrade to existing MR16 halogen downlights. Compatible with all leading brands of transformers on the market, choose this simple and safe solution for great light output and energy saving.



Main applications
DIY Replacement of existing halogen MR16 downlights.

TIP

Compatible with all leading brands of transformers on the market.



UP TO
770
LUMENS

D.I.Y.
INSTALL IT
YOURSELF

IP44
WEATHERPROOF

3 YEAR
WARRANTY


Power		7W	9W
Lumen output	Warm White	550	710lm
	Cool White	590	770lm
Efficacy	Warm White	78lm/W	78lm/W
	Cool White	84lm/W	85lm/W
Colour temperature	Warm White		3,000K
	Cool White		4,000K
Insulation rating	Ø90mm 9W IC abutted & covered Ø70mm 7W CA90 abutted only		
CRI	80+		
Lifespan	35,000h		
Package contents	MR16 LED downlight		

Product codes	Ø70mm cut-out 7W	
	White Fascia	LMR16703KWE
	Warm White Light	LMR16704KWE
	Cool White Light	LMR16704KWE
	Ø90mm cut-out 9W	
	White Fascia	LMR16903KWE
	Warm White Light	LMR16904KWE
	Cool White Light	LMR16904KWE

Install it yourself in 3 easy steps.


1. Remove.

Unplug and remove existing MR16 halogen downlight.

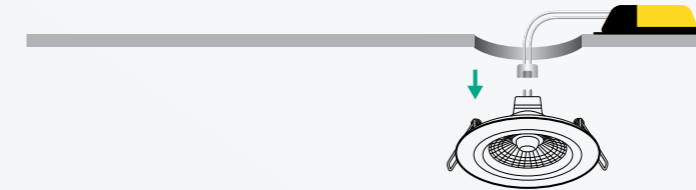

2. Replace.

Plug-in your new HPM MR16 LED downlight and install back into ceiling.

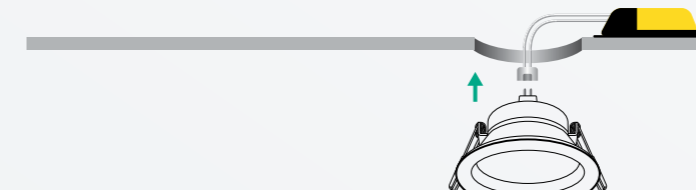

3. Ready.

Enjoy great light output, sleek design and up to 80% energy saving.

