

Data Sheet

TORAN LED Floodlight with Sensor

CAT NO. LFS0316WBL



Cat No	LFS0316WBL
Description	TORAN LED Floodlight with Sensor
Construction	UV resistant ABS plastic aluminium heat sink
Supply voltage	230-240V a.c. 50Hz
Colour	Black
Power input	20W
Power output	16W
Lumens output	1700lm
Sensor detection method	Passive infrared (PIR)
Detection range	From 1m up to 12m
Manual override	Yes
Detection angle	180°
Lux adjustment	20 lux to daylight
Time-delay adjustment	(10±5) sec to (4±1) min
Lamp swiveling angle	Vertical 90°; Horizontal 120°
Sensor horizontal swiveling angle	90°
Sensor vertical swiveling angle	45°
Recommended mounting height	>2m wall mount only
Protection class	Class 1
IP Rating	IP44
Weight	0.93kg
Dimension	240 x 188 x 180mm
Warranty	3 years

TORAN LED Floodlight with Sensor


CAT NO. LFS0316WBL



- 16W model is ideal for small areas
- PIR sensor with:
 - Adjustable detection range from 1 to 12m using "sens" knob
 - Adjustable time delay from 10 sec to 4 min using "time" knob
 - Adjustable lux activation from 20 lux to daylight using "lux" knob
 - Automatic sensor with manual override up to 180° detection angle
- 30,000 hours lifespan
- IP44 weatherproof rating
- Ideal for driveways, secluded walkways, front and back porches
- 3 year warranty

Single product			
Cat No	Dimensions	Weight	Barcode
LFS0316WBL	200W x 188H x 272D mm	1.31kg	9321001441328

Outer box (Qty 4)			
Cat No	Dimensions	Weight	Barcode
LFS0316WBL	420W x 395H x 292D mm	6.05kg	9321001441489

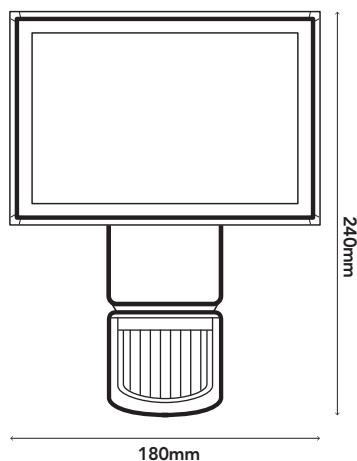

HPM Legrand - AUS
1300 369 777
www.hpm.com.au
ABN 31 000 102 661

HPM Legrand - NZ
0800 476 009
www.hpm.co.nz

Refer to your group buying office, HPM Legrand Sales Representative or HPM Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.