



A brand of  legrand®

LED LIGHTING



BRIGHT
STYLISH
EFFICIENT

3rd EDITION

CONTENTS

LED LIGHTING EXPLAINED	2
LED LIGHTING FIXTURES	4
DOWNLIGHTS	6
PANEL LIGHTS	20
OYSTER LIGHTS	22
INTERIOR UP/DOWN LIGHTS	26
STEP LIGHTS	30
STARLIGHTS	32
STRIPLIGHT	34
EXTERIOR UP/DOWN LIGHTS	36
OUTDOOR BUNKER LIGHT	42
FLOODLIGHTS	44
WORKLIGHTS	56
LED LIGHTING GLOBES	58
DIMMERS AND LED COMPATIBILITY	68
DOWNLIGHT ACCESSORIES	68
LIGHTING SENSORS	70
INDEX OF PROTECTION	71



LED LIGHTING EXPLAINED

LIGHT COLOUR

Expressed in Degrees Kelvin (K), light colours are the key to determining the mood of a room.

WARM WHITE	DEGREES	2700-3000K
	DESCRIPTION	SOFTER, WARMER LIGHT Comparable to traditional incandescent lighting. Preferred in cooler climates
	ROOM	Bedroom, living room, bathroom, kitchen
COOL WHITE	DEGREES	4000K
	DESCRIPTION	NEUTRAL LIGHT Used for task lighting and preferred in warmer, tropical climates
	ROOM	Laundry, garage, study, bathroom, kitchen

AVERAGE LAMP LIFE

LED 30,000 HOURS	COMPACT FLUORESCENT 10,000 HOURS	INCANDESCENT 1,000 HOURS
------------------	----------------------------------	--------------------------

DURABILITY: LEDs are very long-lasting compared to other lighting technologies, with an average 30,000 hours life expectancy. We use quality components which make our lamps even more durable, being laboratory tested and assessed at 30,000 hours life expectancy. That represents approximately 20 years based on 3 to 4 hours usage per day.

DIMMING COMPATIBILITY

Critical to a successful installation is an understanding of LED compatibility with dimmers.

HPM is one of the only major brands on the market to deliver a full solution from dimmers to drivers and LED fixtures. Choose the winning combination of HPM LED fixtures and HPM or Legrand dimmers to ensure superior performance – including smooth dimming with no flickering, reliability and long life.



LIGHT PERFORMANCE

LIGHT OUTPUT	INCANDESCENT	HALOGEN	CFL	LED
220lm	25W	18W	5-7W	3W
420lm	40W	28W	7-8W	4-5W
720lm	60W	42W	11-12W	6-8W
930lm	75W	52W	13-18W	9-13W
1300lm	100W	70W	18-23W	16-20W

LUMINOUS EFFICACY (lm/W)

Picking a lamp fixture based only on wattage or physical size could result in the wrong choice: Wattage (measured in W) represents the power consumed by the luminaire. The actual output of a lamp is measured in lumens (lm): the more lumens, the more light emitted by the luminaire. A smart criteria for determining the efficiency of a light fixture is its lumens/Watt ratio, which represents how much light the fixture delivers versus what it consumes to perform. This value is called luminous efficacy, and proves LED lights are more efficient than other light technologies.

COLOUR RENDERING INDEX (CRI)

CRI measures how well a lamp makes colours appear. CRI scores light sources from 1 – 100: a high CRI means that the eye can pick up slight variations in colour, making details in an interior appear sharper and more vibrant. For outstanding colour rendering, opt for our Dalia series which boasts a very high 92 index.

Our downlights range from 80 to 92, to enhance skin tones, hues and textures in rooms.

BEAM ANGLE

The light effect from a luminaire is determined by its beam angle, that is the shape and direction of light generated by the lamp. Most conventional fixtures deliver a focused light distribution at 35-60° beam angle, but LED technology can go well above those values, while still maintaining a fair pool of light.

Our lights deliver beam angles ranging from 80 to 120° to ensure a beautiful light is spread throughout a room.

OUR QUALITY PROMISE



DIMMING COMPATIBILITY

Yes! Our lights can be dimmed effectively. For optimum dimming performance and to avoid flickering, use HPM or Legrand dimmers. See p.69-70 for more details



INSULATION RATING

All recessed luminaires included in this brochure have an IC or IC-4 insulation rating. This means insulation may abut or cover the LED luminaire



NATA ACCREDITED LABORATORY

To ensure the highest possible quality assurance standards all HPM lighting fixtures and lamps are tested in our NATA accredited laboratory in Sydney



All our products are assured against insects and moisture, with IP ratings ranging from IP44 to IP65. See IP chart on p.71 for more information

LED LIGHTING FIXTURES



DLI DOWNLIGHT SERIES (5W TO 7W)

The functional design and classic finish of the DLI adds a touch of contemporary lighting. The DLI is ideal for all rooms in the house. At only 5W to 7W the DLI delivers maximum brightness with limited power consumption.



Main applications

Living areas, bedrooms, bathrooms, outdoor areas (undercover)

TIP

Recessed diffuser reduces glare



DLI70 SERIES



DLI90 SERIES



DLI125 SERIES

UP TO
880
LUMENS

IC-4
INSULATION RATING

IP44
WEATHERPROOF


3 YEAR
WARRANTY

Power		5W	7W	7W
Lumen output		70mm	90mm	125mm
	Warm White	505lm	700lm	750lm
	Cool White	515lm	820lm	880lm
Efficacy		70mm	90mm	125mm
	Warm White	101lm/W	100lm/W	107lm/W
	Cool White	103lm/W	117lm/W	125lm/W
Colour temperature	Warm White			3,000K
	Cool White			4,000K
CRI	80+			
Dimming	Trailing edge dimmers			
Lifespan	35,000h			
Package contents	5W to 7W dimmable downlight with integrated driver. Supplied with flex and plug			

Product codes	Ø70mm cut-out	
	White Fascia	
	Warm White Light	DLI7001
	Cool White Light	DLI7002
	Brushed Chrome Fascia	
	Warm White Light	DLI7003
	Cool White Light	DLI7004
	Ø90mm cut-out	
	White Fascia	
	Warm White Light	DLI9001
	Cool White Light	DLI9002
	Brushed Chrome Fascia	
	Warm White Light	DLI9003
	Cool White Light	DLI9004
	Ø125mm cut-out	
	White Fascia	
	Warm White Light	DLI12501
	Cool White Light	DLI12502


DLI70 Series

BEAM
ANGLE 90°




DLI90 Series

BEAM
ANGLE 85°



DLI125 Series

BEAM
ANGLE 90°



AZA+ DOWNLIGHT SERIES (8W)

The AZA+ sits flush with the ceiling blending seamlessly with any décor and provides bright and energy saving illumination.



Main applications

Living areas, bedrooms, bathrooms, outdoor areas (undercover)



TIP

At only 65mm depth, AZA+ downlights will fit in most ceiling cavities



Power	8W	
Lumen output	Warm White	750lm
	Cool White	820lm
Efficacy	Warm White	93lm/W
	Cool White	102lm/W
Colour temperature	Warm White	3,000K
	Cool White	4,000K
CRI	80+	
Dimming	Trailing edge dimmers	
Lifespan	35,000h	
Package contents	8W dimmable downlight with integrated driver. Supplied with flex and plug	

Product codes	White Fascia	
	Warm White Light	LDL043KWE
	White Fascia	
	Cool White Light	LDL044KWE
	Polished Silver Fascia	
	Warm White Light	LDL043KPS
	Polished Silver Fascia	
	Cool White Light	LDL044KPS

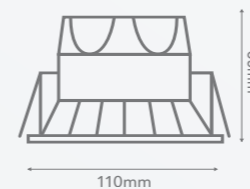

DALIA

DOWNLIGHT SERIES (15W)

Equipped with a Citizen LED chip, these superior downlights are our brightest and deliver exceptional colour rendering, making details in an interior space appear sharper and more vibrant. Dalia is a fusion of craftsmanship, highest-calibre materials and advanced technology. Available in white or polished aluminium.



Main applications

Living areas, bedrooms, bathrooms, outdoor areas (undercover)


TIP

With an outstanding 92+ CRI, Dalia downlights illuminate objects and surfaces in their true colours



Power	15W	
Lumen output	Warm White	950lm
	Cool White	980lm
Efficacy	Warm White	63lm/W
	Cool White	65lm/W
Colour temperature	Warm White	3,000K
	Cool White	4,000K
CRI	92+	
Dimming	Trailing & leading edge, 2 & 3 wire	
Lifespan	30,000h	
Construction	Corrosion resistant anodised aluminium	
Package contents	Dimmable SELV external LED driver and 15W LED sealed fixture. Supplied with flex and plug	
Product codes	White Fascia Warm White Light	LDL023KWE
	White Fascia Cool White Light	LDL024KWE
	Aluminium Fascia Warm White Light	LDL023KPS
	Aluminium Fascia Cool White Light	LDL024KPS

BEAM
ANGLE 80°



85-90
MM
CUT-OUT

UP TO
980
LUMENS



IP44
WEATHERPROOF


6 YEAR
WARRANTY



AZALEA DOWNLIGHT SERIES (9W)



A marriage of style and function, our Azalea effortlessly achieves optimum lighting performance with impressive economy. With a 48mm depth, it is brilliant for tight ceiling cavities and multi-floor dwellings.

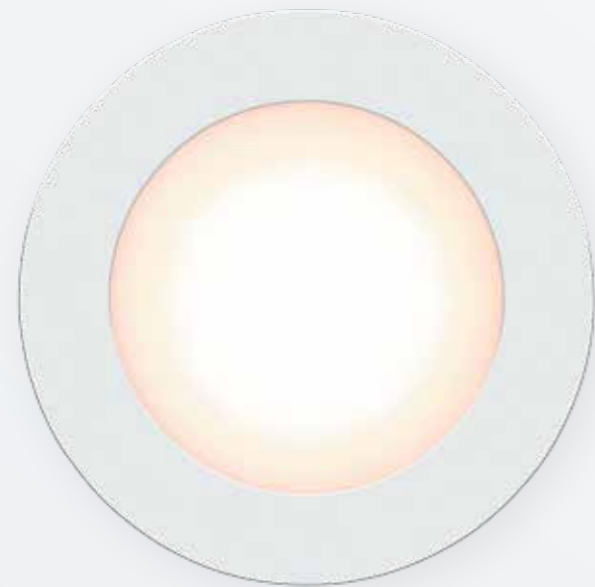

Main applications

Living areas, bedrooms, bathrooms, outdoor areas (undercover)




UP TO
890
LUMENS

IC-4
INSULATION RATING

IP44
WEATHERPROOF

6 YEAR
WARRANTY

Power	9W	
Lumen output	Warm White	880lm
	Cool White	890lm
Efficacy	Warm White	98lm/W
	Cool White	99lm/W
Colour temperature	Warm White	3,000K
	Cool White	4,000K
CRI	80+	
Dimming	Trailing & leading edge, 2 & 3 wire	
Lifespan	30,000h	
Construction	Aluminium	
Package contents	Dimmable SELV external LED driver and 9W LED sealed fixture. Supplied with flex and plug	
Product codes	White Fascia Warm White Light	LDL013KWE
	White Fascia Cool White Light	LDL014KWE
	Aluminium Fascia Warm White Light	LDL013KPS
	Aluminium Fascia Cool White Light	LDL014KPS



DLS DOWNLIGHT SERIES (10W)

Behind the stylish façade of white or brushed chrome, the DLS features a frosted recessed diffuser to reduce glare and ensure a perfect light spread across any room. Our vision, improving your vision.



Main applications

Living areas, bedrooms, bathrooms, outdoor areas (undercover)


TIP

Recessed diffuser reduces glare



Power	10W	
Lumen output	Warm White	800lm
	Cool White	830lm
Efficacy	Warm White	80lm/W
	Cool White	83lm/W
Colour temperature	Warm White	3,000K
	Cool White	4,000K
CRI	80+	
Dimming	Trailing edge dimmers	
Lifespan	30,000h	
Package contents	Dimmable SELV external LED driver with quick-connect plug and 10W LED sealed fixture. Supplied with flex and plug	


Product codes	White Fascia	
	Warm White Light	DLS9001
	White Fascia	
	Cool White Light	DLS9002
	Brushed Chrome Fascia	
	Warm White Light	DLS9003
	Brushed Chrome Fascia	
	Cool White Light	DLS9004



FREESIA DOWNLIGHT SERIES (7W)



The diminutive Freesia series delivers a big performance with a minimal footprint. Available in both white or polished aluminium, it is ideal for retrofitting halogen lights with 70mm hole cut-outs.

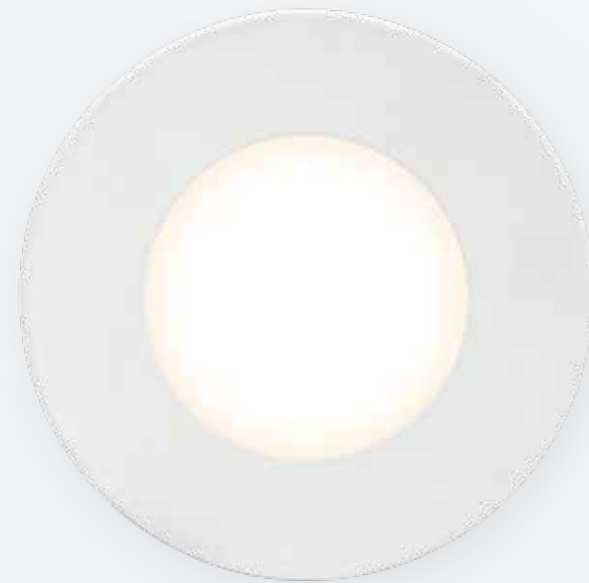


Main applications

Living areas, bedrooms, bathrooms, outdoor areas (undercover)

TIP

Freesia's 70mm cut-out makes it an ideal upgrade of fixed halogen downlights

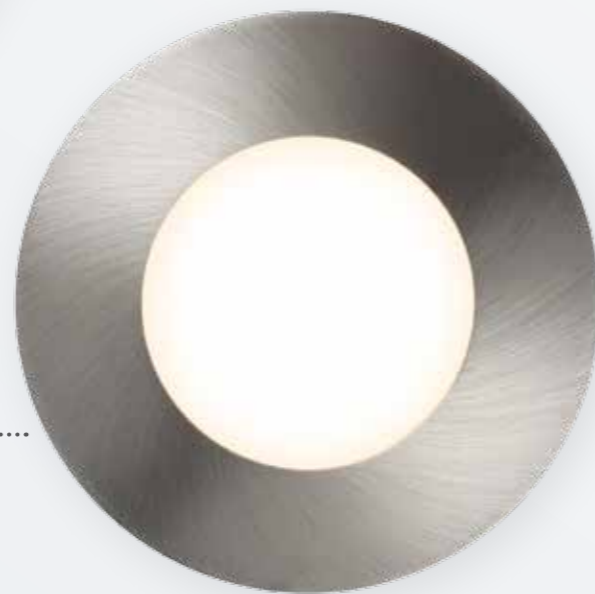


500 LUMENS*

IC-4
INSULATION RATING

IP44
WEATHERPROOF

6 YEAR WARRANTY

Power	7W	
Lumen output	Warm White	600lm
	Cool White	620lm
Efficacy	Warm White	86lm/W
	Cool White	89lm/W
Colour temperature	Warm White	3,000K
	Cool White	4,000K
CRI	80+	
Dimming	Trailing & leading edge, 2 & 3 wire	
Lifespan	30,000h	
Construction	Aluminium	
Package contents	Dimmable SELV external LED driver and 7W LED sealed fixture. Supplied with flex and plug	
Product codes	White Fascia	
	Warm White Light	LDL033KWE
	White Fascia	
	Cool White Light	LDL034KWE
	Aluminium Fascia	
	Warm White Light	LDL033KPS
	Aluminium Fascia	
	Cool White Light	LDL034KPS



MR16 RETROFIT DOWNLIGHT SERIES (7W TO 9W)



This patented energy efficient MR16 retrofit LED downlight has been designed as a DIY upgrade to existing MR16 halogen downlights. Compatible with all leading brands of transformers on the market, choose this simple and safe solution for great light output and energy saving.



Main applications
DIY Replacement of existing halogen MR16 downlights.

TIP

Compatible with all leading brands of transformers on the market.



UP TO
770
LUMENS

D.I.Y.
INSTALL IT
YOURSELF

IP44
WEATHERPROOF

3 YEAR
WARRANTY


Power		7W	9W
Lumen output	Warm White	550	710lm
	Cool White	590	770lm
Efficacy	Warm White	78lm/W	78lm/W
	Cool White	84lm/W	85lm/W
Colour temperature	Warm White		3,000K
	Cool White		4,000K
Insulation rating	Ø90mm 9W IC abutted & covered Ø70mm 7W CA90 abutted only		
CRI	80+		
Lifespan	35,000h		
Package contents	MR16 LED downlight		

Product codes	Ø70mm cut-out 7W	
	White Fascia	LMR16703KWE
	Warm White Light	LMR16704KWE
	Cool White Light	LMR16704KWE
	Ø90mm cut-out 9W	
	White Fascia	LMR16903KWE
	Warm White Light	LMR16904KWE
	Cool White Light	LMR16904KWE

Install it yourself in 3 easy steps.


1. Remove.

Unplug and remove existing MR16 halogen downlight.

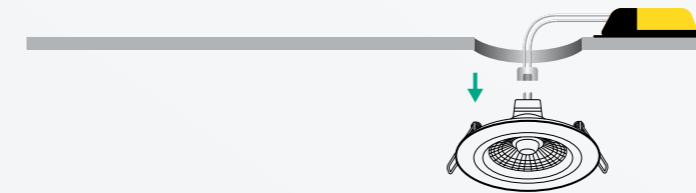



2. Replace.

Plug-in your new HPM MR16 LED downlight and install back into ceiling.

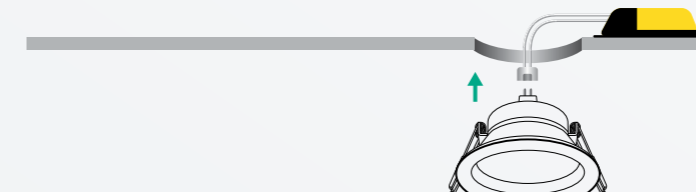

3. Ready.

Enjoy great light output, sleek design and up to 80% energy saving.

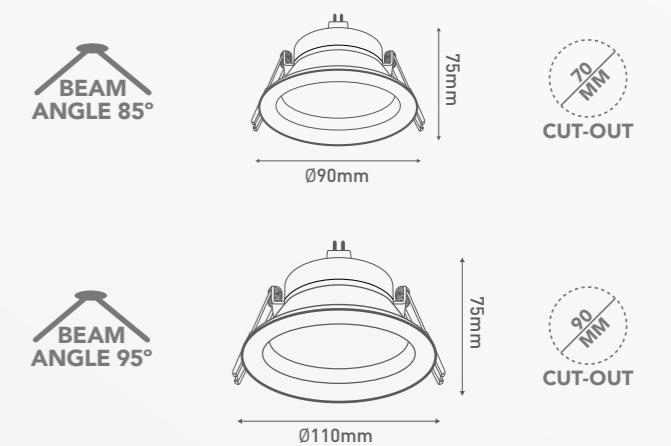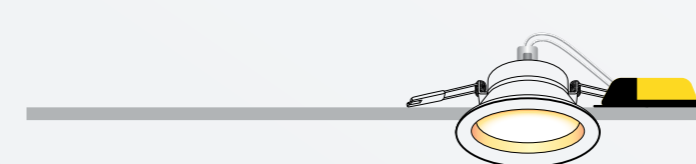

LUNA

PANEL LIGHTS (18W)

Offering the ultimate in discreet lighting, the Luna's slim depth allows it to fit effortlessly into tight ceiling cavities. All the illumination of an oyster light, none of the obtrusiveness.



Main applications

Living areas, bedrooms, bathrooms, and undercover outdoor areas.
Ideal replacement for oyster lights

Power	18W	
Lumen output	Warm White	1,440lm
	Cool White	1,500lm
Efficacy	Warm White	80 lm/W
	Cool White	83 lm/W
Colour temperature	Warm White	3,000K
	Cool White	4,000K
CRI	80+	
Dimming	Trailing & leading edge, 2 & 3 wire	
Lifespan	30,000h	
Construction	Aluminium	
Package contents	Dimmable SELV external LED driver and 18W LED sealed fixture. Supplied with flex and plug	
Product code	White Fascia Warm White Light	LPA013KWE
	White Fascia Cool White Light	LPA014KWE



UP TO
1500
LUMENS

INSULATION RATING

IP44
WEATHERPROOF

6 YEAR
WARRANTY



ATIS

OYSTER LIGHTS (17W)


The Atis brings a touch of simple elegance to any room. Providing evenly distributed ambient light from the ceiling makes it the ideal light for task, general or accent lighting.



Main applications

Living areas, bedrooms, bathrooms, and undercover outdoor areas.

Power	17W	
Lumen output	Warm White	1,650lm
	Cool White	1,750lm
Efficacy	Warm White	98lm/W
	Cool White	104lm/W
Colour temperature	Warm White	3,000K
	Cool White	4,000K
CRI	80+	
Dimming	Trailing edge dimmers	
Lifespan	30,000h	
Construction	Metal base with polycarbonate lens	
Package contents	17W LED dimmable oyster light, wall plugs and screws	
Product code	White Finish	
	Warm White Light	LOL013KWE
	White Finish	
	Cool White Light	LOL014KWE

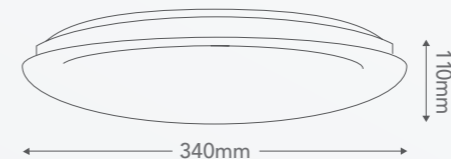

Dimmable

3 YEAR WARRANTY



AURA OYSTER LIGHTS (18W)



With a simple unobtrusive design the Aura provides a pleasant, evenly distributed light that is ideal in larger living areas.



Main applications

Living areas, bedrooms, bathrooms


Power	18W	
Lumen output	Warm White	1,520lm
	Cool White	1,550lm
Efficacy	Warm White	84lm/W
	Cool White	86lm/W
Colour temperature	Warm White	3,000K
	Cool White	4,000K
CRI	80+	
Dimming	Trailing & leading edge, 2 & 3 wire	
Lifespan	24,000h	
Construction	Metal base with silver trim and plastic diffuser	
Package contents	18W LED dimmable oyster light, wall plugs and screens	
Product code	White Fascia Warm White Light	L0L023KPS
	White Fascia Cool White Light	L0L024KPS



Dimmable


3 YEAR WARRANTY

BEAM ANGLE 105°

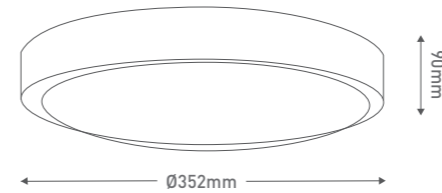

KORA INTERIOR UP/DOWN LIGHT (8.3W)

Kora throws light both up and down to create a beautiful light pattern on walls and imbue rooms with convivial ambience. The stylish cube design will complement contemporary interiors starring clean lines.

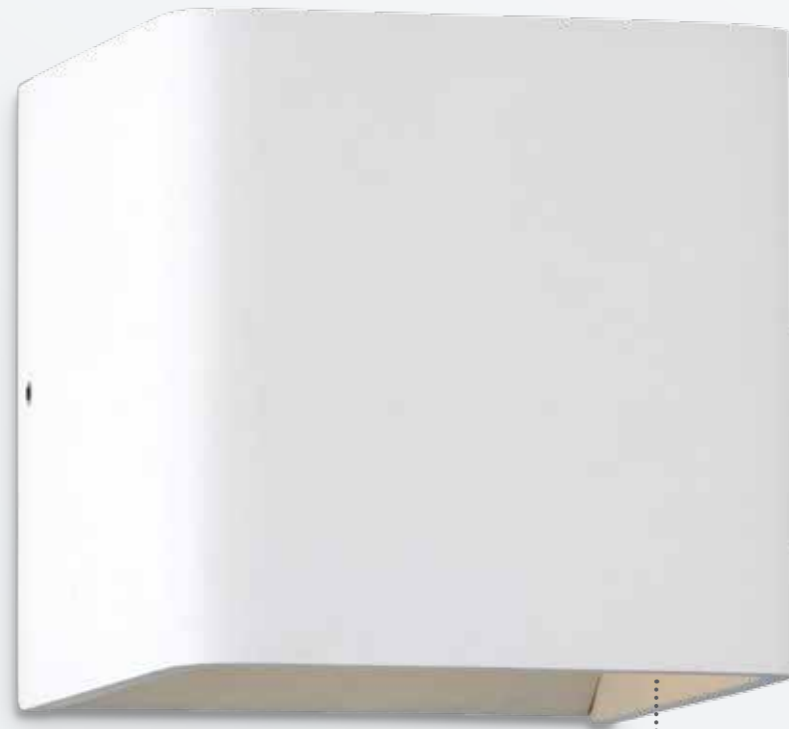


↑
Light flows both
up and down
↓

Main applications

Living areas, hallways, entrances

Power	8.3W	
Lumen output	Warm White	335lm
Efficacy	Warm White	40lm/W
Colour temperature	Warm White	3,000K
CRI	80+	
Lifespan	30,000h	
Construction	Anodised aluminium with white finish	
Package contents	8.3W LED up/down light fixture, wall plugs and screws	
Product code	White Finish Warm White Light	LWL053KWE

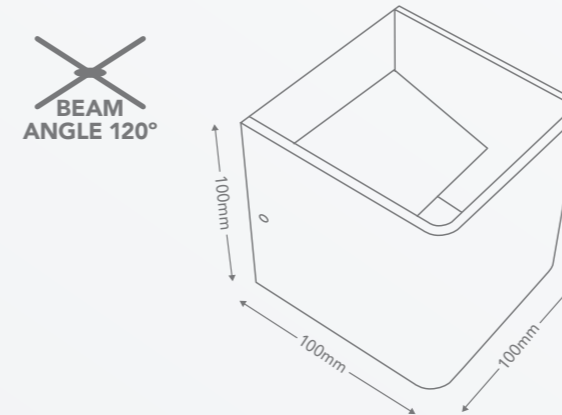

335
LUMENS

UP/DOWN
LIGHT BEAM

6 YEAR
WARRANTY



DIAMA

INTERIOR UP/DOWN LIGHT (7.5W)

Transform walls into a visual feast with a Diama fixture. With its unique two-directional light beam, Diama is the perfect light for enhancing architecture.



↑
Light flows both
up and down
↓



TIP


Combine this architectural light with Legrand Arteor switches and sockets to create a genuine feel of interior elegance and refinement

Main applications

Living areas, hallways, entrances

Power	7.5W	
Lumen output	Warm White	520lm
Efficacy	Warm White	69lm/W
Colour temperature	Warm White	3,000K
CRI	80+	
Lifespan	30,000h	
Construction	Anodised aluminium with high gloss white finish	
Package contents	7.5W LED up/down light fixture, wall plugs and screws	
Product code	White Finish Warm White Light	LWL033KWE

BEAM ANGLE 120°

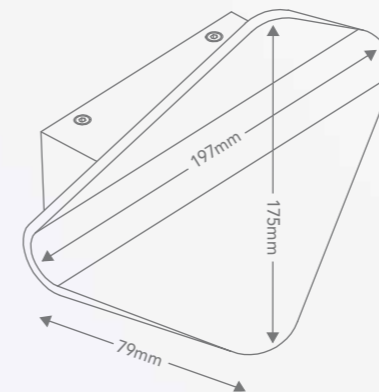

520 LUMENS

UP DOWN LIGHT BEAM

6 YEAR WARRANTY



CALLA STEP LIGHTS (2.4W)

Scale the heights of style with Calla step lights, an illuminating choice for stairwells or hallways. Whether indoor or outdoor, the Calla excels with its impressive IP65 weatherproof rating.

Main applications

Stairs, hallways, corridors



TIP

Use every second or third step, approximately 300-350mm above floor level, for the ultimate light spread




Power	2.4W	
Lumen output	Warm White	24lm
Efficacy	Warm White	10lm/W
Colour temperature	Warm White	3,000K
CRI	80+	
Dimming	Trailing & leading edge, 2 & 3 wire	
Lifespan	30,000h	
Construction	Corrosion resistant anodised aluminium	

Weatherproof rating	IP65	
Package contents	2.4W LED step light fixture	
Product codes	White Finish Warm White Light	LST013KWE
	Aluminium Finish Warm White Light	LST013KPS
	Driver Kit	LDR02D700/18

Installation Must be installed with driver kit LDR02D700/18. A minimum of 2 and a maximum of 6 step lights must be connected with each driver. Step lights must be connected in series.

Driver kit contents LDR02D700/18	Plug, lead, driver
	900mm DRIVER 100mm
	Plug coupler (x2) 100mm
	Socket coupler (x2) 100mm
	Jumper (x1) 300mm

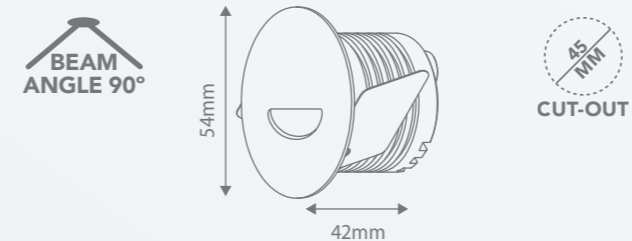

ZINNIA STARLIGHTS (2.4W)

A fusion of discretion and efficiency, the Zinnia starlights are an in vogue choice for those with an eye for detail. Whether illuminating under cabinets or wall features, indoors or outdoors, the Zinnia is the epitome of versatile style. Available in white and silver. Weatherproof rated IP65.

Main applications

Under cabinets, alfresco areas, home theatres. Ideal for illuminating features and creating ambience



TIP


With a slim 35mm depth, Zinnia fits into almost any wall or ceiling cavity




Power	2.4W	
Lumen output	Warm White	95lm
Efficacy	Warm White	39lm/W
Colour temperature	Warm White	3,000K
CRI	80+	
Dimming	Trailing & leading edge, 2 & 3 wire	
Lifespan	30,000h	
Construction	Corrosion resistant anodised aluminium	
Weatherproof rating	IP65	
Package contents	2.4W LED starlight fixture	
Product codes	White Finish	
	Warm White Light	LST023KWE
	Aluminium Finish	
	Warm White Light	LST023KPS
	Driver Kit	LDR02D700/18

Installation Must be installed with driver kit LDR02D700/18. A minimum of 2 and a maximum of 6 starlights must be connected with each driver. Starlights must be connected in series.

Driver kit contents LDR02D700/18

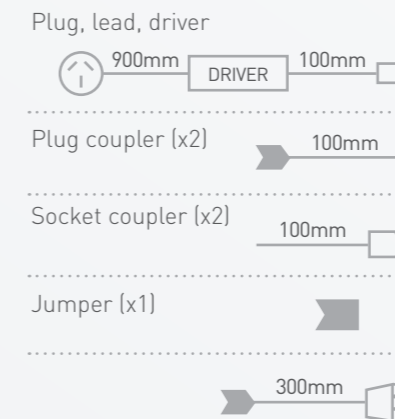

BEAM ANGLE 45°



32MM CUT-OUT

95 LUMENS



IP65 WEATHERPROOF

6 YEAR WARRANTY

RIBA STRIPLIGHT

Where other lights fear to tread the Riba calls home. Whatever your lighting challenge, the Riba is equipped to match it - and always with style to spare. Be it a confined space or delicate mood lighting, satisfaction is assured.



Main applications

Under cabinets,
entertaining areas,
kitchens, home theatres



Power	7.2W	
Lumen output	Warm White	600lm
Efficacy	Warm White	50lm/W
Colour temperature	Warm White	3,000K
CRI	80+	
Lifespan	30,000h	
Package contents	LDR01N700/36: 1m LED strip 7.2W & plug-in 36W transformer LSL013K: 1m LED strip with quick-connector	

Installation Starter kit (cat no LDR01N700/36) contains plug-in transformer with 1m LED strip. Additional inter-connectible 1m LED strips available (cat no LSL013K). Connect up to 5m of LED strips on one transformer. LED strips can be cut off every 10cm.

Product codes	LED striplight (1m) and transformer	LDR01N700/36
	LED striplight (1m) and quick-connector	LSL013K

600 LUMENS
QUICK CONNECT UP TO 5M
3 YEAR WARRANTY



STRIPLIGHT

MIKA

EXTERIOR UP/DOWN LIGHT (7W)

The Mika outdoor wall light features a modern design with smooth curved lines perfect for adding a contemporary look to gardens, patios and alfresco areas. This wall light casts both up and down providing ambient illumination to any outdoor space.




↑
Light flows both
up and down
↓

Main applications

Exterior walls, pillars,
front entrances and alfresco areas

Power	7W	
Lumen output	Warm White	350lm
Efficacy	Warm White	50lm/W
Colour temperature	Warm White	3,000K
CRI	80+	
Lifespan	30,000h	
Construction	Anodised aluminium	
Package contents	7W LED up/down light fixture with allen key for mounting, wall plugs and screws	
Product code	Aluminium Finish Warm White Light	LWL063KPS

**BEAM
ANGLE 120°**

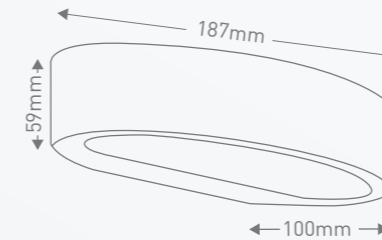

**350
LUMENS**

**UP DOWN
LIGHT BEAM**

**IP54
WEATHERPROOF**

**6 YEAR
WARRANTY**



KYRA

EXTERIOR UP/DOWN LIGHT (7.5W)

The multi-talented Kyra represents the ultimate in lighting versatility. Fitted with adjustable panels, Kyra effortlessly oscillates from an uplight to a downlight, or even both. Ideal for highlighting entrances or pillars. Weatherproof rated IP54.



↑
Light can flow
up, down or both
up and down
↓




TIP

Use in conjunction with Legrand 3 wire outdoor sensors to automatically switch on lights when movement is detected

Main applications

Exterior walls, pillars, front entrances

Power	7.5W
Lumen output	Warm White 430lm
Efficacy	Warm White 57lm/W
Colour temperature	Warm White 3,000K
CRI	80+
Lifespan	30,000h
Construction	Anodised aluminium
Package contents	7.5W LED up/down light fixture allen key for mounting, wall plugs and screws
Product code	Aluminium Finish Warm White Light LWL023KPS

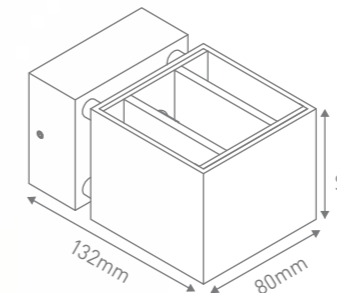

430
LUMENS

UP DOWN
LIGHT BEAM

IP54
WEATHERPROOF

6 YEAR
WARRANTY

PINNA

EXTERIOR UP/DOWN LIGHT (10W)

Slimline, discreet, stylish - the Pinna thrives in outdoor spaces. Utilise its dual-direction beam to foster an atmosphere of blissful tranquility. Weatherproof rated IP54 and corrosion resistant.



↑
Light flows both
up and down
↓

TIP

Match Pinna with Legrand Soliroc weatherproof switches and sockets for a harmonious outdoor theme




Main applications

Exterior walls, pillars, front entrances and backyard entertainment areas

Power	10W
Lumen output	Warm White 380lm
Efficacy	Warm White 38lm/W
Colour temperature	Warm White 3,000K
CRI	80+
Lifespan	30,000h
Construction	Corrosion resistant anodised aluminium
Package contents	10W LED up/down light fixture, allen key for mounting, wall plugs and screws
Product code	Aluminium Finish Warm White Light LWL013KPS

~~BEAM~~
ANGLE 120°

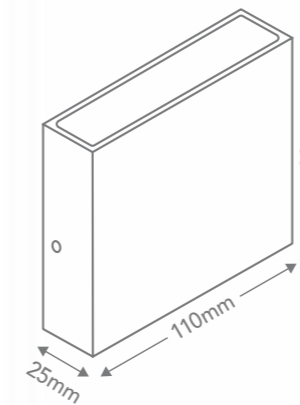

380
LUMENS

UP DOWN
LIGHT BEAM

IP54
WEATHERPROOF

6 YEAR
WARRANTY



OROYA OUTDOOR BUNKER LIGHT (12W)

The Oroya is a great choice as a weatherproof outdoor lighting solution with the versatility of being mounted on a wall or in a ceiling. With a weatherproof IP65 rating, it is the ideal solution as an outdoor oyster light or bunker wall light.

Power	12W	
Lumen output	Cool White	870lm
Efficacy	Cool White	72lm/W
Colour temperature	Cool White	4,000K
CRI	80+	
Construction	UV resistant polycarbonate	
Package contents	12W outdoor light fixture, wall plugs and screws	
Product codes	White Finish Cool White Light	LBL014KWE


870
LUMENS

Wall or
Ceiling
Mounting

IP65
WEATHERPROOF

3 YEAR
WARRANTY

BEAM
ANGLE 118°

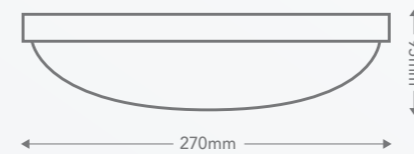

Main applications

Outdoor walls and ceilings



TWIN FLOODLIGHT WITH SENSOR (29W)

This versatile floodlight features dual lights that can be independently positioned allowing different areas to be illuminated. Ideal for secluded walkways and driveways the PIR sensor automatically activates lights when motion is detected within the detection range.




TIP

Passive infrared sensors are sensitive to a person's skin temperature through emitted body radiation, in contrast to background objects at room temperature. No energy is emitted from the sensor, thus the name "Passive Infrared" (PIR)

Power	29W	
Lumen output	Warm White	2,200lm
Efficacy	Warm White	75lm/W
Colour temperature	Warm White	3,000K
CRI	80+	
Lifespan	30,000h	
Head swivel angle	120°	
Sensor detection range/angle	12m / 180°	
Sensor time-delay adjustment	10 (±5) seconds to 4 (±1) minutes	
Sensor type	Passive Infrared (PIR)	
Construction	UV resistant polycarbonate	
Package contents	29W Twin LED floodlight with PIR sensor, wall plugs and screws, 2x14W PAR38 LED lamps	
Product code	Black Finish Warm White Light	LFS013KBL

BEAM ANGLE 120°

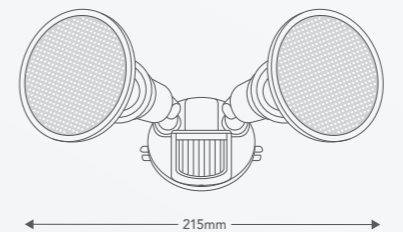

PAR38 replacement LED lamp (LPAR38013K)




2200 LUMENS

ADJUSTABLE TIME-DELAY & LUX LEVEL

IP44 WEATHERPROOF

3 YEAR WARRANTY

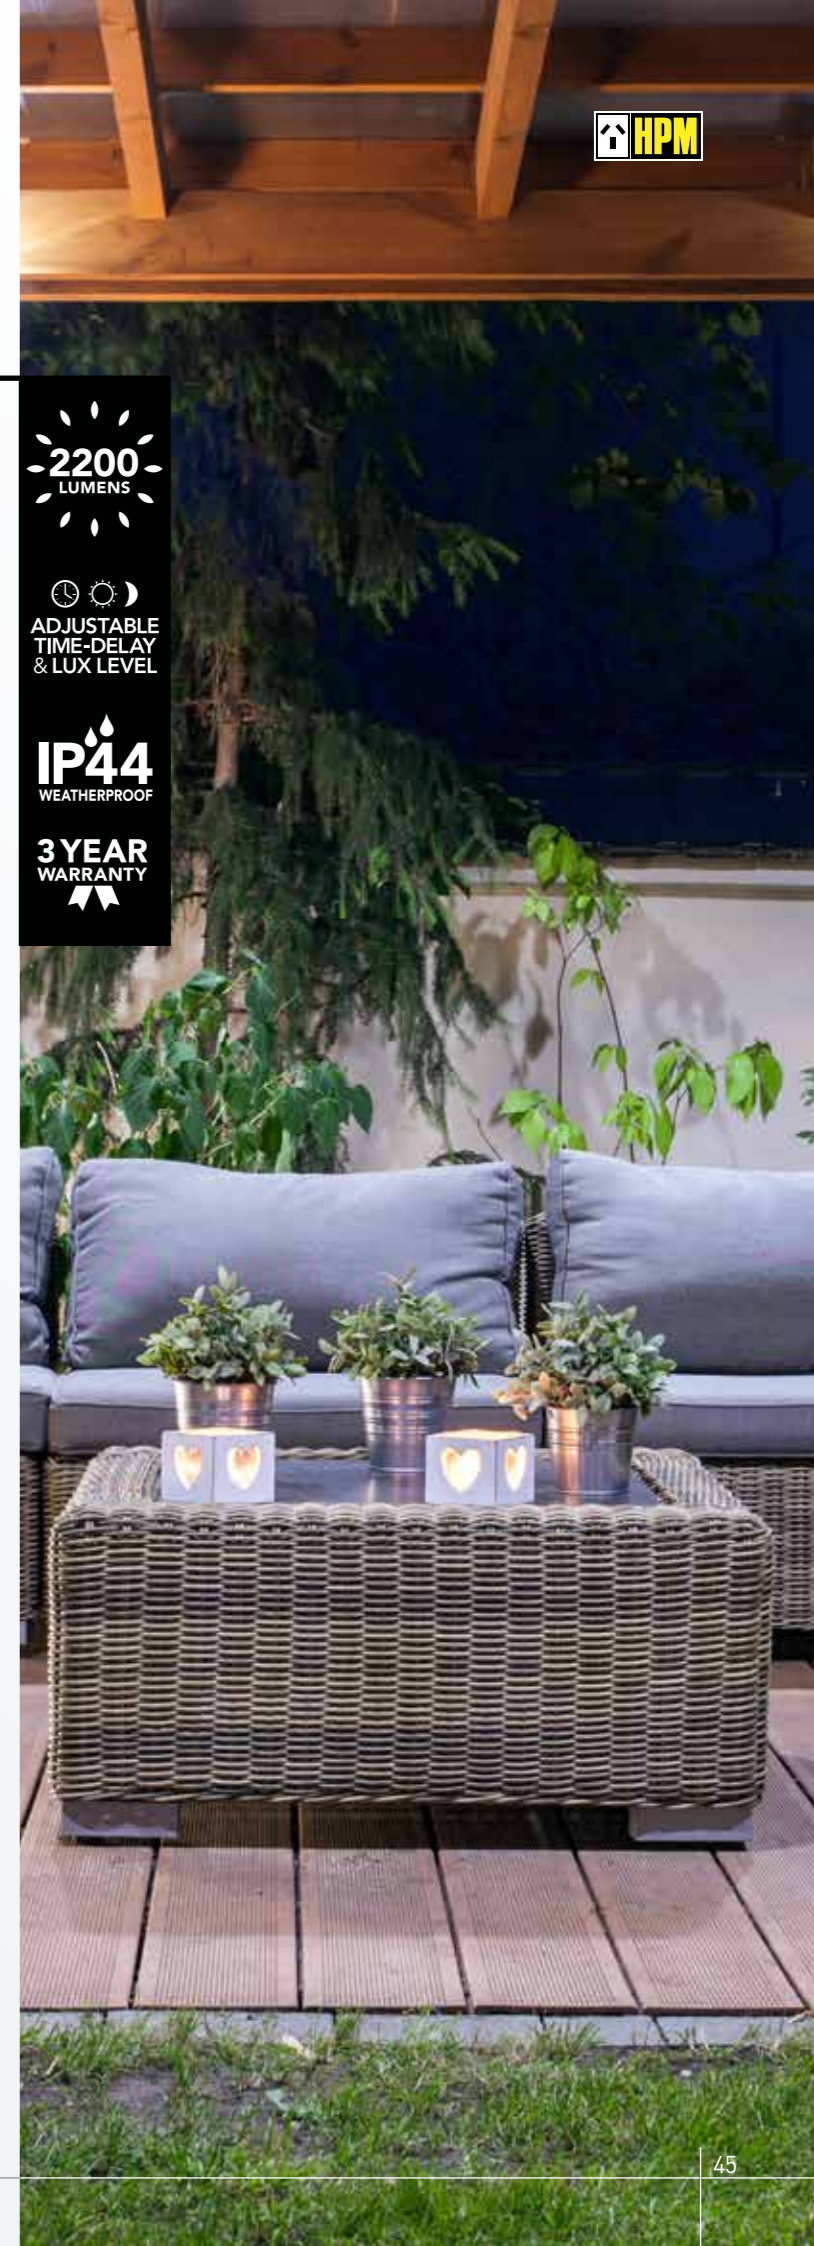

SIKA FLOODLIGHTS (12W TO 25W)


A great choice for lighting walkways and outdoor areas, this floodlight is a bright energy saver. Its simple design blends seamlessly with any decor style making it a versatile choice. The Sika with motion sensor switches on automatically when movement is detected.



TIP

Ideal for driveways, including walkways, front and back porches

Power	12W		25W
Lumen output	Cool White	1,070	2,200lm
Efficacy	Cool White	88lm/W	89lm/W
Colour temperature	Cool White	4,000K	
CRI	80+		
Lifespan	15,000h		
Head swivel angle	130° vertical / 180° horizontal		
Sensor detection range/angle	12m / 180°		
Sensor time-delay adjustment	10 (±5) seconds to 4 (±1) minutes		
Sensor type	Passive Infrared (PIR)		
Sensor manual override	Yes		
Construction	Die-cast aluminium body		
Package contents	12W to 25W LED floodlight, wall plugs and screws		
Product code			
Single spot	12W		LSP0112WBL
Double spot	25W		LSP0125WBL
Single spot	12W with PIR sensor		LSS0112WBL
Double spot	25W with PIR sensor		LSS0125WBL

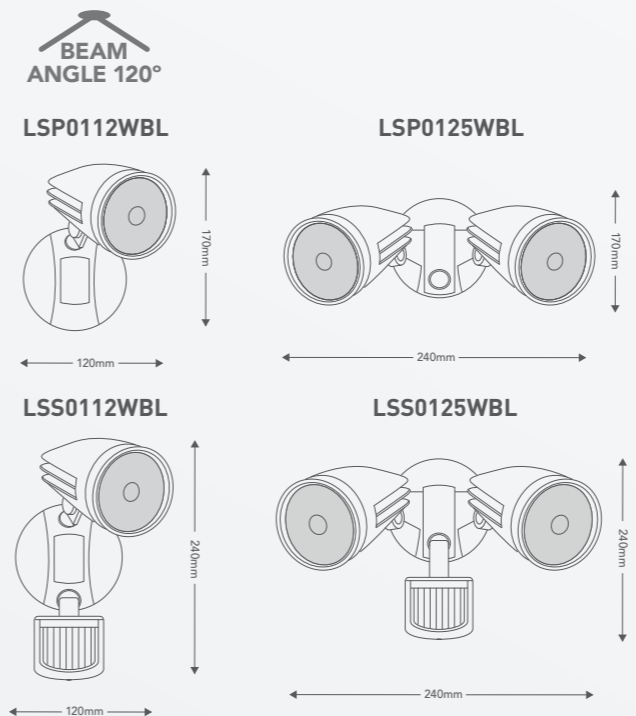

UP TO
2200
LUMENS

ADJUSTABLE
TIME-DELAY
& LUX LEVEL

IP44
WEATHERPROOF

3 YEAR
WARRANTY



FORTA FLOODLIGHTS (10W TO 40W)



Sporting a slick black, die-cast aluminium body, Forta floodlights look fantastic as well as throw a powerful light. The optional PIR sensor automatically turns on the light when it detects movement, which is both a great energy saving and security feature.



Main applications

Ideal for driveways, secluded walkways, front and back porches

UP TO
3000
LUMENS


Sensor options available

IP44
WEATHERPROOF


3 YEAR
WARRANTY

Power	10W 20W 30W 40W	
Lumen output	Cool White 730 1615 2250 3000lm	
Efficacy	Cool White 73 80 75 75lm/W	
Colour temperature	Cool White	4,000K
CRI	80+	
Lifespan	15,000h	
Construction	Die-cast aluminium	
Head swivel angle	180° vertical	
Sensor detection range/angle	12m / 180°	
Sensor time-delay adjustment	10 (±5) seconds to 4 (±1) minutes	
Sensor type	Passive Infrared (PIR)	
Sensor manual override	Yes	
Package contents	LED floodlight with mounting bracket, wall plugs and screws	
Product code	10W	LFL0110WBL
	20W	LFL0120WBL
	30W	LFL0130WBL
	40W	LFL0140WBL
	10W with PIR sensor	LFS0110WBL
	30W with PIR sensor	LFS0130WBL


LFL0110WBL




LFL0120WBL




LFL0130WBL

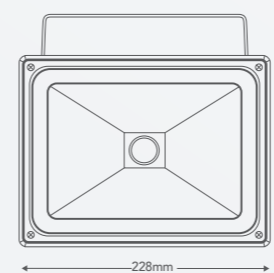


LFL0140WBL

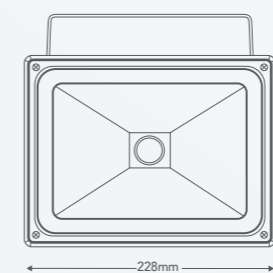

LFS0110WBL

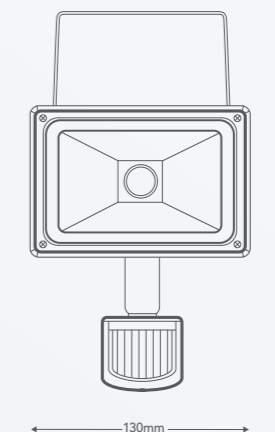

LFS0130WBL

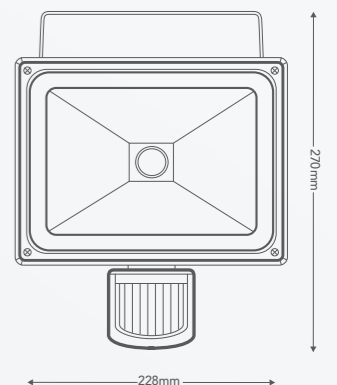

TORAN

FLOODLIGHT WITH SENSOR (16W)

Ideal for mounting under eaves or for illuminating driveways, the Toran keeps you safe with style. Equipped with a motion sensor for energy saving and an adjustable head which enables 180° flexibility.




Main applications

Ideal for driveways, secluded walkways, front and back porches

Power	16W	
Lumen output	Cool White	1,700lm
Efficacy	Cool White	106lm/W
Colour temperature	Cool White	4,000K
CRI	80+	
Lifespan	30,000h	
Head swivel angle	90° vertical / 120° horizontal	
Sensor detection range/angle	12m / 180°	
Sensor time-delay adjustment	10 (±5) seconds to 4 (±1) minutes	
Sensor type	Passive Infrared (PIR)	
Sensor manual override	Yes	
Construction	UV resistant polycarbonate with aluminium heat sink	
Package contents	16W LED floodlight with sensor, wall plugs and screws	
Product code	Black Finish Cool White Light	LFS0316WBL

BEAM
ANGLE 100°

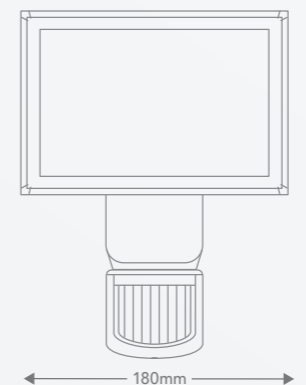

UP TO
1700
LUMENS

PIR
SENSOR WITH
MANUAL
OVERRIDE

IP44
WEATHERPROOF

3 YEAR
WARRANTY



MAXIS FLOODLIGHT (9W)



The Maxis provides added security to outdoor areas with an integrated PIR motion sensor that lights up automatically when movement is detected.




Horizontal and vertical adjustable head up to 90°

Main applications

Ideal for driveways, secluded walkways, front and back porches

Power	9W	
Lumen output	Cool White	900lm
Efficacy	Cool White	100m/W
Colour temperature	Cool White	4,000K
CRI	80+	
Lifespan	25,000h	
Head swivel angle	90° vertical and horizontal	
Sensor detection range/angle	8m / 130°	
Sensor time-delay adjustment	10 (±5) seconds to 4 (±1) minutes	
Sensor type	Passive Infrared (PIR)	
Construction	UV resistant polycarbonate	
Package contents	9W LED floodlight with sensor, wall plugs and screws	
Product code	Black Finish Cool White Light	LSS0209WBL

BEAM ANGLE 120°

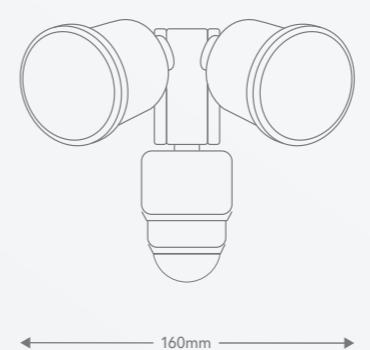

900 LUMENS

ADJUSTABLE TIME-DELAY & LUX LEVEL

IP44 WEATHERPROOF

3 YEAR WARRANTY



BAKRA FLOODLIGHT (11W)

Illuminate your outdoor space with the Bakra. The functional design casts a wide spread of light making outdoor spaces brighter and safer.



Main applications

Ideal for driveways, secluded walkways, front and back porches



Power	11W	
Lumen output	Cool White	1,100lm
Efficacy	Cool White	100lm/W
Colour temperature	Cool White	4,000K
CRI	80+	
Head swivel angle	180° vertical (No sensor) 90° vertical (Sensor)	
Lifespan	15,000h (No sensor) 30,000h (Sensor)	
Construction	UV Resistant ABS Plastic aluminium heat sink	
Sensor detection range/angle	8m / 130°	
Sensor time-delay adjustment	10 (±5) seconds to 4 (±1) minutes	
Sensor type	Passive Infrared (PIR)	
Sensor manual override	No	
Package contents	LED floodlight with mounting brackets, wall plugs and screws	
Product code	Black Finish 11W	LFL0213WBL
	11W with PIR sensor	LFS0214WBL

UP TO
1100
LUMENS

ADJUSTABLE
HEAD 180°




IP44
WEATHERPROOF


3 YEAR
WARRANTY

BEAM
ANGLE 105°

LFL0213WBL

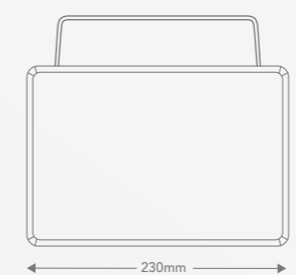


LFS0214WBL

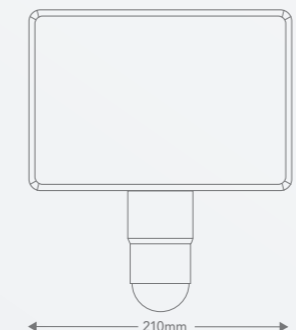

FORTA WORKLIGHTS (10W TO 40W)



Brighten up a work space on site, at home, in the garage or workshop with a high performing Forta LED worklight. Increase visibility and safety indoors or outdoors with this IP44 weatherproof rated range.

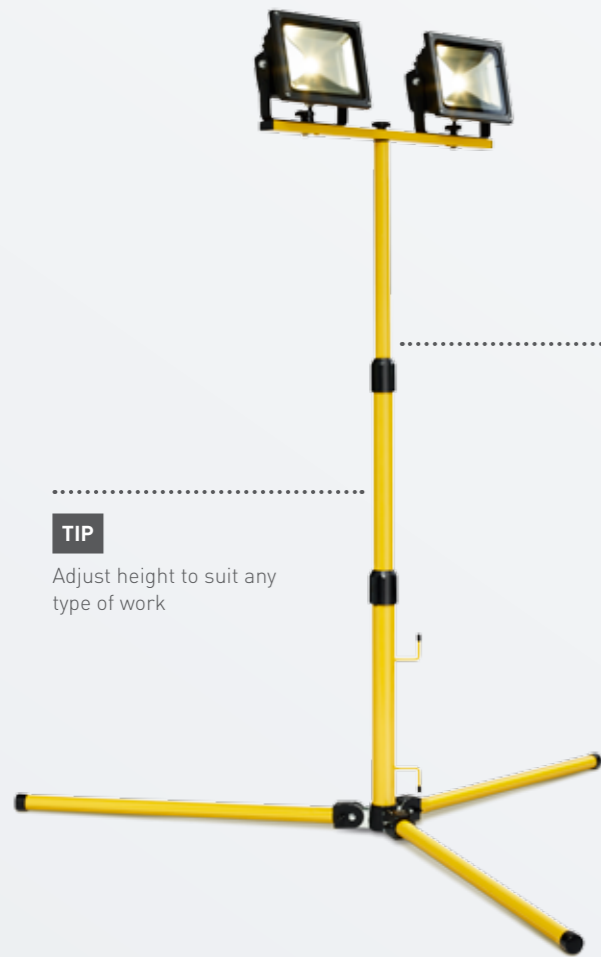

Main applications
Illuminating work spaces

TIP
Adjust height to suit any type of work








UP TO
3230
LUMENS

IP44
WEATHERPROOF

EASY
PLUG-IN

3 YEAR
WARRANTY

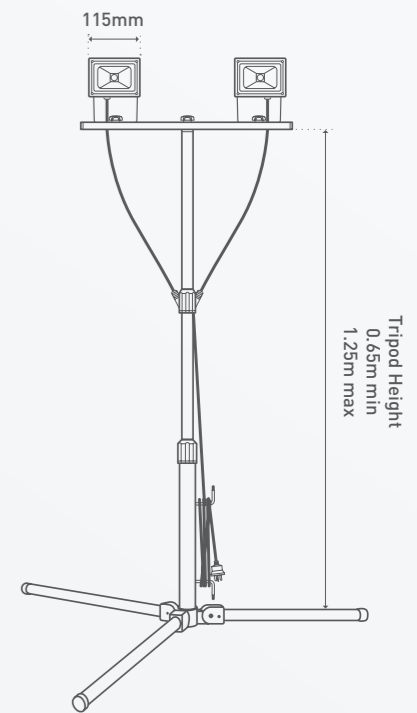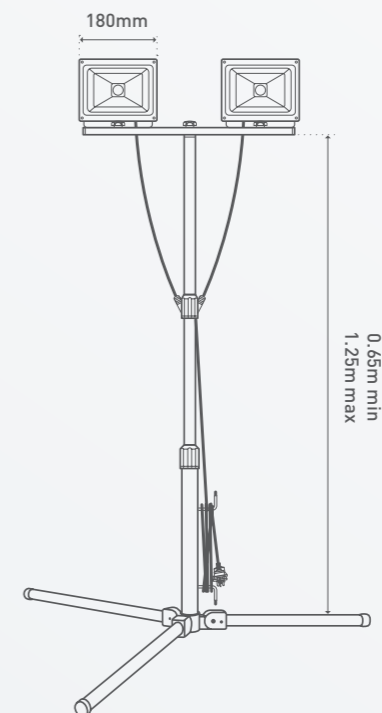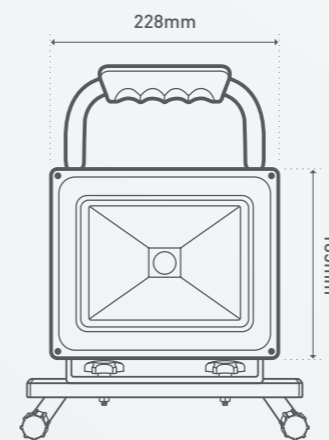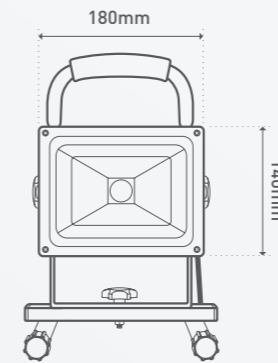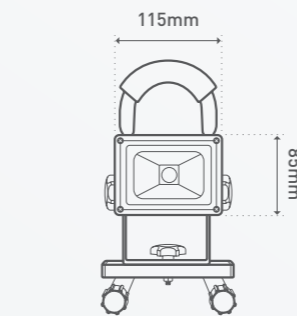

Power		10W 20W 30W 2x10W 2x20W
Lumen output	Cool White	730 1615 2250 2x730 2x1615lm
Efficacy	Cool White	73 80 75 73 80lm/W
Colour temperature	Cool White	4,000K
CRI		80+
Lifespan		15,000h
Construction		Die-cast aluminium
Height Adjustment		Yes tripod
Head swivel angle		180° vertical
Weatherproof rating		IP44
Package contents		LED Worklight with flex and plug
Product code	Portable	
	10W	LWK0110WBL
	20W	LWK0120WBL
	30W	LWK0130WBL
	Tripods	
	2x10W	LWK0220WBL
	2x20W	LWK0240WBL

LED LIGHTING GLOBES



A60 LED GLOBES (5W TO 8W)

UP TO
1035
LUMENS


MAXIMUM EFFICACY
UP TO 129lm/W

B22 + E27
OPTIONS

3 YEAR
WARRANTY

Power	5W	8W	
Lumen output	Warm White	490lm	945lm
	Cool White	520lm	1,035lm
Efficacy	Warm White	98lm/W	118lm/W
	Cool White	104lm/W	129lm/W
Colour temperature	Warm White	3,000K	
	Cool White	4,000K	
CRI	80+		
Lifespan	25,000h		
Base	Bayonet B22 Edison E27		
Package contents	A60 LED Globe 5W or 8W, mounted with Bayonet B22 or Edison E27 base		

Product code	5W Globes	
	Warm White BC	LA60013KBC
	Warm White ES	LA60013KES
	Cool White BC	LA60014KBC
	Cool White ES	LA60014KES
Product code	8W Globes	
	Warm White BC	LA60023KBC
	Warm White ES	LA60023KES
	Cool White BC	LA60024KBC
	Cool White ES	LA60024KES

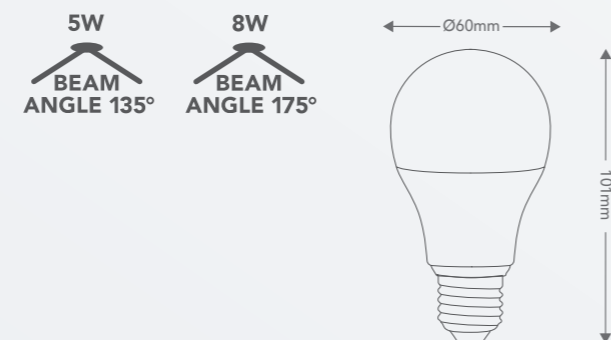

A60 FILAMENT LED GLOBES (3.7W)


500
LUMENS

MAXIMUM EFFICACY
UP TO 135lm/W

B22 + E27
OPTIONS

3 YEAR
WARRANTY

Power	3.7W	
Lumen output	Warm White	500lm
Efficacy	Warm White	135m/W
Colour temperature	Warm White	3,000K
CRI	80+	
Lifespan	10,000h	
Base	Bayonet B22 Edison E27	
Package contents	A60 filament LED Globe 3.7W mounted with Bayonet B22 or Edison E27 base	
Product code	Warm White BC	LA6001FILBC
	Warm White ES	LA6001FILES

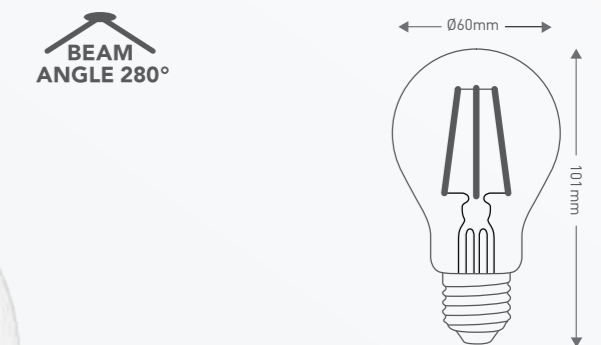

TIP
Ideal for pendants and chandeliers



A60 INSECT LED GLOBES (5W)

UP TO
460
LUMENS



Less attractive to insects


B22 + E27
OPTIONS



3 YEAR
WARRANTY

Power	5W	
Lumen output	460lm	
Efficacy	92lm/W	
Light Colour	Yellow	
Lifespan	25,000h	
Base	Bayonet B22 Edison E27	
Package contents	A60 LED Globe 5W mounted with Bayonet B22 or Edison E27 base	
Product code	BC	LA6001BUGBC
	ES	LA6001BUGES

BEAM
ANGLE 210°

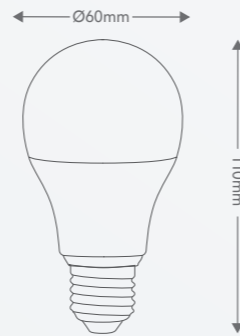

BAYONET B22 (BC)

EDISON E27 (ES)

Main applications

Specially turned colour filter so that light is less attractive to insects

CANDLE LED GLOBES (3W TO 5W)


300
LUMENS



3 YEAR
WARRANTY

Power		3W	5W
Lumen output	Warm White	300lm	560lm
Efficacy	Warm White	100lm/W	112lm/W
Colour temperature	Warm White	3,000K	
CRI	80+		
Base	Edison Screw E14		
Package contents	Candle 3W or 5W mounted with Edison E14 Base		
Product code	3W Warm White SES	LCA013KSES	
	5W Warm White SES	LCA023KSES	

BEAM
ANGLE 180°

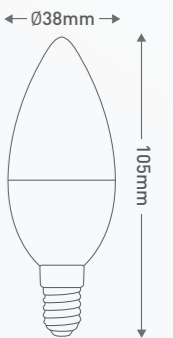

EDISON E14 (SES)

Main applications

Chandeliers, table lamps and various luminaires

GU10 LED GLOBES (5W)


UP TO
500
LUMENS

MAXIMUM EFFICACY
UP TO 100lm/W

3 YEAR
WARRANTY

Power	5W	
Lumen output	Warm White	460lm
	Cool White	500lm
Efficacy	Warm White	92lm/W
	Cool White	100lm/W
Colour temperature	Warm White	3,000K
	Cool White	4,000K
CRI	80+	
Lifespan	15,000h	
Base	GU10	
Package contents	5W LED Globe with GU10 base	
Product code	5W LED Globes	
	Warm White	LGU10013K
	Cool White	LGU10014K

BEAM
ANGLE 65°



GU10

Main applications

Perfect upgrade of existing GU10 halogen fixtures

PAR38 LED GLOBE (14W)


UP TO
1100
LUMENS

EDISON
E27

3 YEAR
WARRANTY

Power	14W	
Lumen output	Warm White	1,100lm
Efficacy	Warm White	78lm/W
Colour temperature	Warm White	3,000K
CRI	80+	
Lifespan	30,000h	
Base	Edison E27	
Package contents	PAR38 Globe 14W mounted with Edison E27 base	
Product code	Warm White ES	LPAR38013K

BEAM
ANGLE 120°

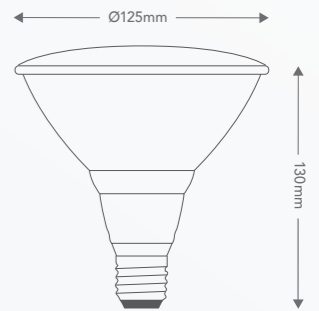

EDISON E27 (ES)

R63 LED GLOBE (5.7W)


570 LUMENS

EDISON E27

3 YEAR WARRANTY

Power	5.7W	
Lumen output	Warm White	570lm
Efficacy	Warm White	100lm/W
Colour temperature	Warm White	3,000K
CRI	80+	
Lifespan	25,000h	
Base	Edison E27	
Package contents	R63 LED Globe 5.7W mounted with Edison E27 base	
Product code	Warm White ES	LR63013KES

BEAM ANGLE 110°

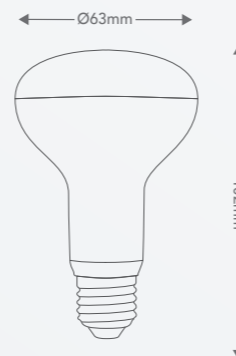

EDISON E27 (ES)

R80 LED GLOBES (7W TO 7.5W)

UP TO 700 LUMENS


Dimmable option

MAXIMUM EFFICACY UP TO 100lm/W

3 YEAR WARRANTY

Power	7W	7.5W
Lumen output	Warm White 580lm Cool White 700lm	650lm 690lm
Efficacy	Warm White 82lm/W Cool White 100lm/W	86lm/W 92lm/W
Colour temperature	Warm White Cool White	3,000K 4,000K
CRI	80+	
Dimming	Trailing edge dimmers	
Lifespan	18,000h (7W) 25,000h (7.5W)	
Base	Edison E27	
Package contents	7W or 7.5W LED Globe with Edison E27 base	
Product code	7W Globes Non dimmable Warm White LR80023K Cool White LR80024K 7.5W Globes Dimmable Warm White LR80023KD Cool White LR80024KD	

BEAM ANGLE 110°

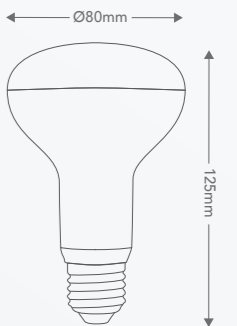

Main applications

Bathroom heater centre light
Reflector type downlights



EDISON E27 (ES)

ACCESSORIES

DOWNLIGHT EXTENSION PLATES



CAT NO.	
LEP120WE	Suitable for hole cut-outs up to Ø120mm
LEP150WE	Suitable for hole cut-outs up to Ø150mm

Suitable for: DLI90, AZA+, Dalia, Azalea, and DLS series

LIGHTING SENSORS

Passive infrared (PIR) sensor

Sensitive to a person's skin temperature through emitted body radiation, in contrast to background objects at room temperature. HPM range of sensors is suitable for both indoor and outdoor for various locations throughout the house including corridors, wardrobes, secluded walkways and garages.

Whether used for extra safety around the house or convenience indoors these deliver great energy savings all year round.

	Image	Description	Finish	Manual override	IP Rating	Application	Mounting type	Detection range	Detection angle	Time delay
630/3		180° PIR SENSOR	White	Yes	IP44	Indoor/Outdoor	Wall surface mounted	12m	180°	8s to 7min
630/3A		180° PIR SENSOR	White	No	IP44	Indoor/Outdoor	Wall surface mounted	12m	180°	8s to 7min
630/3ABL		180° PIR SENSOR	Black	No	IP44	Indoor/Outdoor	Wall surface mounted	12m	180°	8s to 7min
630/5		360° PIR DETECTOR	White	No	IP41	Indoor	Ceiling surface mounted	10m	360°	6s to 12min
630R02WE		360° RECESSED PIR SENSOR	White	No	IP41	Indoor	Ceiling recessed mounted	8m	360°	10s to 10min
630/9-3W		AQUASCAN 3-WIRE PIR SENSOR	White	No	IP66	Outdoor	Wall surface mounted	12m	110°	15s to 7min
488TRI3W		TRISCAN 3-WIRE PIR SENSOR	White	Yes	IP66	Outdoor	Wall surface mounted	8m	120°	8s to 15min



DIMMER COMPATIBILITY

LED FIXTURE RANGE	DIMMER TYPE	DIMMERS COMPATIBILITY	MAXIMUM LIGHTS PER DIMMER	DIMMING RANGE
DLI70 Downlights	Trailing edge only	400A3P	16	100%-1%
		400A2P	16	89%-7%
		250T	11	100%-7%
		400T	16	94%-8%
		700T	28	100%-15%
DLI70 Downlights	Trailing edge only	1000T	40	100%-18%
		400A3P	12	100%-1%
		400A2P	12	97%-9%
		250T	8	100%-7%
		400T	12	100%-7%
AZA+ Downlights DLI90 & DLI125 Downlights	Trailing edge only	700T	21	100%-13%
		1000T	30	100%-16%
		400A3P	8	100%-5%
		400A2P	8	100%-10%
Dalia Downlights Azalea Downlights Freesia Downlights Luna Panel Lights Calla Step Lights Zinnia Starlights	Trailing edge & leading edge	250T / 250L	5	100%-10%
		400T / 400L	8	100%-10%
		700T / 700L	14	100%-25%
		1000T / 1000L	20	100%-25%
		400A3P	8	100%-10%
DLS Downlights	Trailing edge only	400A2P	8	100%-10%
		250T	5	100%-10%
		400T	8	100%-10%
		700T	14	100%-25%
		1000T	20	100%-25%
R80 Dimmable Globe	Trailing edge only	400A3P	12	100%-1%
		400A2P	12	92%-10%
		250T	8	100%-7%
		400T	12	100%-8%



Legrand Excel Life



Legrand Arteur



HPM Linea and Excel

LEGRAND EXCEL LIFE



EM400A3P (3 wire)
EM400A2P (2 wire)
Excel Life 400VA all load 2 & 3 wire electronic push button dimmer mechanism
White:
EM400A3PWE
EM400A2PWE
Urban Grey:
EM400A3PUG
EM400A2PUG



EM250T*
Excel Life 250VA 2 wire trailing edge rotary dimmer mechanism
White:
EM250TRWE
Urban Grey:
EM250TRUG



EM400T*
Excel Life 400VA 2 wire trailing edge rotary dimmer mechanism
White:
EM400TRWE
Urban Grey:
EM400TRUG

LEGRAND ARTEOR



AR400A3P (3 wire)
AR400A2P (2 wire)
Arteur 400VA all load 2 & 3 wire push button dimmer mechanism
White:
AR400A3PMWE
AR400A2PMWE
Magnesium:
AR400A3PMMGN
AR400A2PMMGN



AR400T / AR400L*
Arteur 400VA 2 wire rotary dimmer mechanism
White:
AR400TMWE
AR400LMWE
Magnesium:
AR400TMMGN
AR400LMMGN

HPM LINEA AND EXCEL



400A2P (2 wire)
Excel or Linea and 400VA (2 wire) electronic push button dimmer mechanism
White: 400A2PWE



250T / 250L*
Excel or Linea 250VA 2 wire rotary dimmer mechanism
White: 250LMWE
250TMWE
Also available in black & cream



400T / 400L*
Excel or Linea 400VA 2 wire rotary dimmer mechanism
White: 400TMWE
400LMWE
Also available in black & cream



700T / 700L*
Excel or Linea 700VA 2 wire rotary dimmer mechanism
White: 700TMWE
700LMWE



1000T / 1000L*
Excel or Linea 1000VA 2 wire rotary dimmer mechanism
White: 1000TMWE
1000LMWE

*T = Trailing Edge, L = Leading Edge

INDEX OF PROTECTION

1. Protection against solid bodies and liquids: IP index of protection

Degrees of protection for enclosures of electrical equipment according to standards: IEC 60529, BS EN 60529 and NF EN 60529

1st digit: protection against solid bodies (See AS 1939, Clause 5)

IP	Tests	IP
0	No protection	
1	$\varnothing 50 \text{ mm}$ Protected against solid bodies larger than 50 mm (e.g. accidental contact with the hand)	A
2	$\varnothing 12.5 \text{ mm}$ Protected against solid bodies larger than 12.5 mm (e.g. finger)	B
3	$\varnothing 2.5 \text{ mm}$ Protected against solid bodies larger than 2.5 mm (e.g. tools, wires)	C
4	$\varnothing 1 \text{ mm}$ Protected against solid bodies larger than 1 mm (e.g. fine tools and small wires)	
5	Protected against dust (no harmful deposit)	D
6	Completely protected against dust	

2nd digit: protection of equipment against ingress of harmful liquids (See AS 1939, Clause 6)

IP	Tests	IP
0	No protection	
1	Protected against vertically-falling drops of water (condensation)	
2	Protected against drops of water falling at up to 15° from the vertical	
3	Protected against drops of rain water at up to 60° from the vertical	
4	Protected against projections of water from all directions	
5	Protected against jets of water (from all directions)	
6	Protected against jets of water of similar force to heavy seas	
7	Protected against the effects of immersion	
8	Protected against prolonged effects of immersion	

2. Protection IK, against mechanical impact.

According to standards: IEC 62262, BS EN 62262 and NF EN 62262

IK	Tests	Impact energy (in Joules)
IK 00		0
IK 01	0.2 kg, 75 mm	0.15
IK 02	0.2 kg, 100 mm	0.2
IK 03	0.2 kg, 175 mm	0.35
IK 04	0.2 kg, 250 mm	0.5
IK 05	0.2 kg, 350 mm	0.7

IK	Tests	Impact energy (in Joules)
IK 06	0.5 kg, 200 mm	1
IK 07	0.5 kg, 400 mm	2
IK 08	1.7 kg, 295 mm	5
IK 09	5 kg, 200 mm	10
IK 10	5 kg, 400 mm	20

• This table can be used to ascertain the resistance of a product to an impact given in Joules from the IK code (graduated from 00 to 10)



A brand of **legrand**



Member of:



HPM Legrand Australia
Building 4 Nexus Industry Park
43-47 Lyn Pde Prestons NSW 2170
1300 369 777
www.hpm.com.au

HPM Legrand New Zealand
106-124 Target Road Glenfield
Auckland 0627 New Zealand
0800 476 009
www.hpm.co.nz

HPML0707

10/2016