





# Sika LED Floodlights

Cat. No. LSP0112WBL, LSP0125WBL

## Instruction Manual



LSP0112WBL

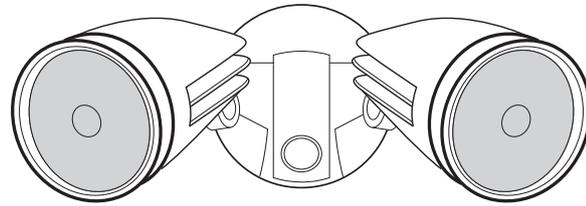

LSP0125WBL

These products must be installed by a licensed electrician.


### Where to mount your floodlight:


1. Installation is to be made in dry weather conditions.
2. Choose a mounting position that is in a sheltered location (e.g. under the eaves of the house). A mounting height of greater than 2m is recommended.
3. Do not operate in close proximity to combustible materials or substances affected by heating or drying. Keep a minimum distance of 0.5m from adjacent objects.

### Installation:

Installing a wall switch adjacent to the power source is recommended.

1. Remove the mounting bracket from the back of the fitting (figure A & B).
2. Loosen the cord anchorage on the mounting bracket by loosening the two screws (figure C).
3. Choose rubber-sheathed 3-core circular cord, H05RN-F 3G 1mm<sup>2</sup> (not supplied) for the mains wiring.
4. Insert mains wiring through the grommet on the mounting bracket (figure D).
5. Connect the mains wiring to the terminal block as marked on the mounting bracket. Ensure that the wires are secure and no bare wires are exposed (figure E).
6. Use the mounting bracket as a template to mark the screw positions onto the wall (figure F).
7. Install the mounting bracket onto the wall. Ensure the method of fixing can support up to a 10kg weight.
8. Place the mains wiring in the cord anchorage system and secure by tightening the screws. Ensure it clamps onto the cord sheath (figure G).
9. Install the fitting back onto the mounting bracket and tighten the screws (figure H & I).
10. Adjust the head of the fitting to the desired position.
11. DO NOT MEGGER TEST.

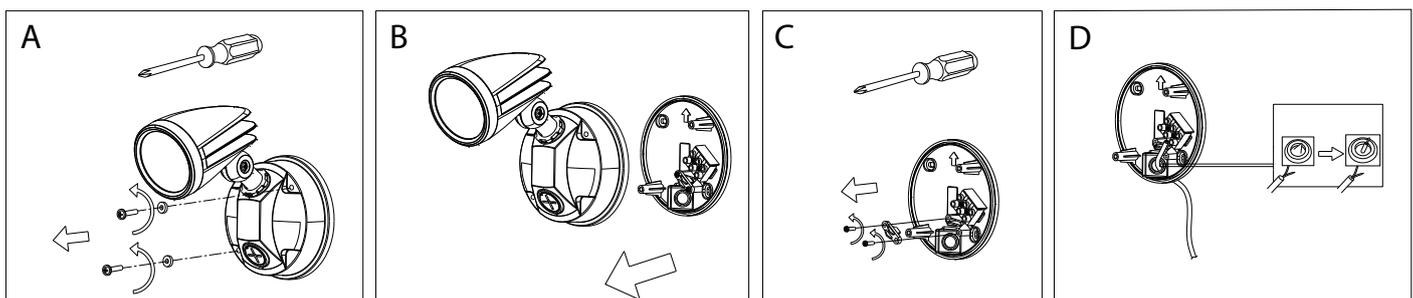

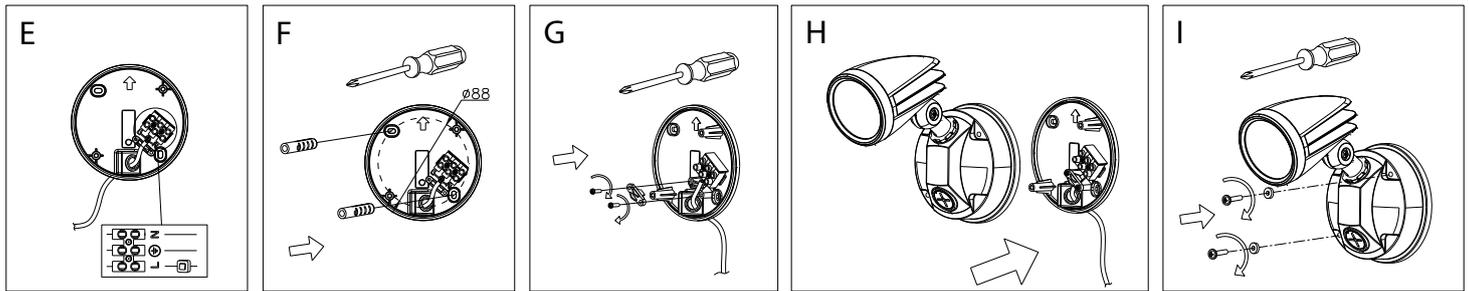

## Specifications

| Cat no.                 | LSP0112WBL                  | LSP0125WBL         |
|-------------------------|-----------------------------|--------------------|
| Supply voltage          | 230-240V a.c. 50Hz          |                    |
| Input power             | 14W                         | 29W                |
| Power output            | 12W                         | 25W                |
| Lumens output           | 1070lm                      | 2200lm             |
| Colour temperature      | Cool white 4000K nominal    |                    |
| Mounting height         | > 2m (recommended)          |                    |
| Protection class        | Class 1                     |                    |
| Weatherproof rating     | IP44                        |                    |
| Size (mm)               | 170 x 120 x 180 mm          | 170 x 240 x 180 mm |
| Weight (excl packaging) | 0.6kg                       | 1kg                |
| Power cord requirement  | H05RN-F 3G 1mm <sup>2</sup> |                    |

## Disclaimers

1. This product must be installed and used as per these instructions.
2. An IP rating of IP44 is generally considered suitable for external walls with supplementary protection such as overhanging eaves.
3. The IP rating of this product is only valid when installed on a flat and non-porous surface. Additional sealing may be required for irregular surfaces.
4. The fixing screws on this product should be tightened to a maximum torque of 0.8Nm. Over tightening may damage the product.
5. This product contains no serviceable parts and no attempt should be made to repair this product. If the product is faulty it should be discarded.
6. This product is not suitable for installation in hazardous and/or corrosive areas.
7. Electrical installations periodically receive transient over voltages. This product has been designed to minimise the effect of such voltages on connected equipment. It may not give full protection for extreme over-voltage transients such as those resulting from a close lighting strike.
8. This product utilises intellectual property in the form of registered designs, trademarks, and/or patents. Such intellectual property remains the property of HPM Legrand in all cases.
9. HPM Legrand reserves the right to modify the specification of this product at any time.
10. This product has been designed to operate in ambient temperatures: -10°C to 45°C.
11. The material in this product may vary in colour from batch to batch. Colour matching from one batch to another cannot be guaranteed.

## Warranty

HPM Legrand warrants this product for a period of 5 years from the date of purchase when used in accordance with these instructions and considering the disclaimers listed herein.

These goods come with guarantees that cannot be excluded under the Australian and New Zealand Consumer Laws. You are entitled to a replacement or a refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired if the goods fail to be acceptable quality and the failure does not amount to a major failure.

See the Warranty card enclosed with this product for further details.

## Customer Service

For all Customer Service and Technical Support please call Monday to Friday during business hours.

wLegrand Australia  
1300 369 777  
www.hpm.com.au

HPM Legrand New Zealand  
0800 476 009  
www.hpm.co.nz

ABN: 31 000 102 661

A Group Brand | 