




LED Floodlights

Instruction Manual

Cat. LFL0409WBL, LFL0415WBL

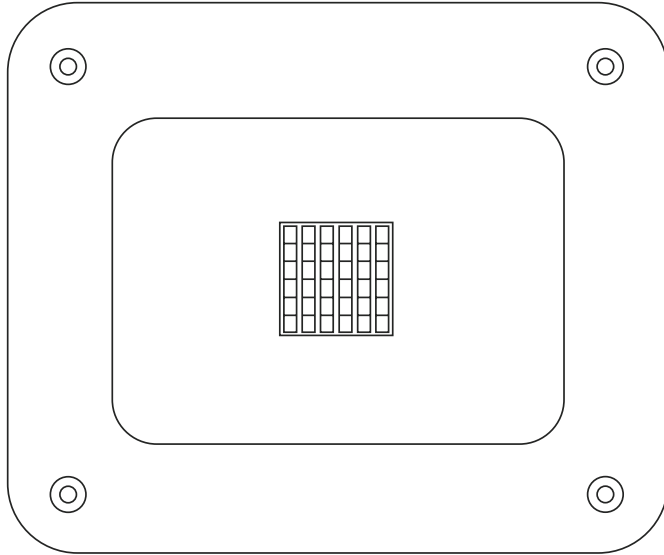

This product must be installed by a licensed electrician.

1 Specifications

Cat No	LFL0409WBL	LFL0415WBL
Supply Voltage	230-240V a.c 50Hz	
Light Colour (Nominal)	Cool White 4000K	
Colour Rendering Index (CRI)	80+	
Beam Angle	110°	
Lifespan	15,000hrs	
Dimmable	No	
IP Rating	IP65	
Recommended mounting height	> 2m	
Length of Power Cord	30cm	
Input Power	9W	15W
Lumens Output	800lm	1490lm
Size (excl mounting bracket)	118 x 100 x 30 mm	148 x 125 x 35 mm
Weight (excl packaging)	420g	620g

2 Installation

Installing a wall switch adjacent to the power source is recommended.

1. Choose a suitable wall / ceiling mount location for the floodlight. A mounting height of greater than 2m is recommended.
2. Remove the mounting bracket from the floodlight & use it to mark the mounting positions on the wall / ceiling.
3. Mount the bracket on the wall / ceiling. Ensure the method of fixing can support up to a 10kg weight.
4. Reattach the floodlight to the mounting bracket. Do not tighten the bolts completely.
5. Terminate the power cord to mains wiring as marked on the label. Ensure that the wires are secure and no bare wires are exposed.
6. Orient the floodlight to the desired position and tighten the bolts completely.
7. DO NOT MEGGER TEST.

3 Maintenance / Cleaning

- * This product should only be cleaned with a damp cloth. Cleaning agents and solvents should not be used.
- * This product should not be cleaned with a hose.

Disclaimers

1. This product must be installed and used as per these instructions.
2. An IP rating of IP65 is generally considered suitable for fully exposed external installations.
3. The IP rating of this product is only valid when installed on a flat and non-porous surface. Additional sealing may be required for irregular surfaces.
4. The mounting screws on this product should be tightened to a maximum torque of 0.8Nm. Over tightening may damage the product.
5. This product contains no serviceable parts and no attempt should be made to repair it. If the product is faulty it should be discarded.
6. This product is not suitable for installation in hazardous and/or corrosive areas.
7. Electrical installations periodically receive transient over-voltages. This product has been designed to minimise the effect of such voltages on connected equipment. It may not give full protection for extreme over-voltage transients such as those resulting from a close lighting strike.
8. This product utilises intellectual property in the form of registered designs, trademarks, and/or patents. Such intellectual property remains the property of HPM Legrand in all cases.
9. HPM Legrand reserves the right to modify the specification of this product at any time.
10. This product has been designed to operate in ambient temperatures -10°C to 40°C.
11. Stated lifespan is an average. Actual lifespan will vary according to individual circumstances.
12. Extended exposure to UV rays (such as exposure to direct sunlight) may cause discolouration of this product.
13. The material in this product may vary in colour from batch to batch. Colour matching from one batch to another cannot be guaranteed.

Warranty

HPM Legrand warrants this product for a period of 3 years from the date of purchase.

These goods come with guarantees that cannot be excluded under the Australian and New Zealand Consumer Laws. You are entitled to a replacement or a refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

See the Warranty card enclosed with this product for further details.

Customer Service

For all Customer Service and Technical Support please call Monday to Friday during business hours.

Legrand Australia
1300 369 777
www.hpm.com.au

HPM Legrand New Zealand
0800 476 009
www.hpm.co.nz

ABN: 31 000 102 661

A Group brand |  legrand