

Datasheet

ARTEOR™ with NETATMO



Smart Dimmer Vertical – 1 Gang


CAT. NO. AWNVDM1WE, AWNVDM1MGN, AWNVDM1ALU, AWNVDM1CHP



AWNVDM1WE



AWNVDM1MGN

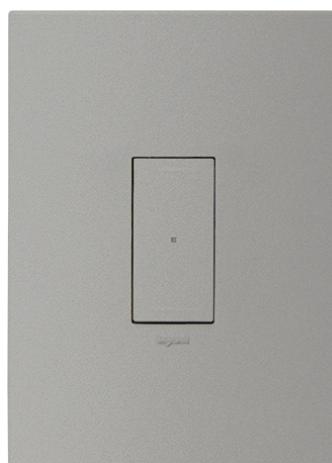

AWNVDM1ALU



AWNVDM1CHP

Cat No.	AWNVDM1WE	AWNVDM1MGN	AWNVDM1ALU	AWNVDM1CHP
Colour	White (WE)	Magnesium (MGN)	Aluminium (ALU)	Champagne (CHP)
Description	Smart Dimmer Vertical 1 Gang, 1 Module, 3 Wire			
Nominal Input Voltage	230 - 240 V a.c. 50Hz			
Max. Load	150 W			
No. of Gang	1 Gang			
Wired/Wireless	Wired			
IP Rating	IP2X			
Mounting Centre	84 mm			
Product Dimension (W X H X D)	127 X 92 X 42 mm			
Cutout Dimensions (W X H)	56 x 96 mm			
Wireless Connectivity	Zigbee 2.4Ghz to 2.4835Ghz			
Compliance	AS/NZS 60669.2.1, ETSI EN 300 328, AS/NZS 4268			

Smart Dimmer Vertical – 1 Gang











CAT. NO. AWNVDM1WE, AWNVDM1MGN, AWNVDM1ALU, AWNVDM1CHP

- Smart dimmer switch to expand an Arteur with Netatmo installation (requires installation of Starter kit or Basic kit).
- 3 ways to control for better user convenience: standard press on the dimmer switch, via smart devices or voice control.
- Compatibility with all 3 voice assistants: Apple SIRI, Google Home and Amazon Alexa.
- Energy consumption display to keep track of energy consumption.
- Push notifications to stay informed of home status.
- Arteur range: elegant design and stylish 17 coverplates finishes available.
- Supplied complete with support frame, coverplate, paint cover, and load stabilising capacitor.
- Easy to install.
- User-friendly app.

Single product		
Cat No.	Barcode	Dimensions
AWNVDM1WE	9321001488781	160 X 130 X 90mm
AWNVDM1MGN	9321001488934	
AWNVDM1ALU	9321001489078	
AWNVDM1CHP	9321001489221	

Outer Box (QTY 10)		
Cat No.	Barcode	Dimensions
AWNVDM1WE	9321001489382	368 X 185 X 391mm
AWNVDM1MGN	9321001489535	
AWNVDM1ALU	9321001489672	
AWNVDM1CHP	9321001489825	

Load Characteristics

 + 45° C + 5° C			LED 		
100 - 240 V AC 50/60 Hz	2 x 2.5 mm ²				
240 VAC	Max.	150 W	(*)150 W	150 W	150 W
100 VAC	Max.	75 W	(*)75 W	75 W	75 W

(*) For good light comfort, it is recommended to use bulbs of the same type and the same manufacturer.

With the dimmer option operating mode (which can be activated via the App), this switch functions only with dimmable bulbs (which can be identified by the logo on the packaging).

- Bench test prior to installation.