





A brand of **legrand**

# Lenka- Frameless Downlight


Cat. No. LPRD023KWE

LPSQ023KWE





## Instruction Sheet



LPRD023KWE



LPSQ023KWE

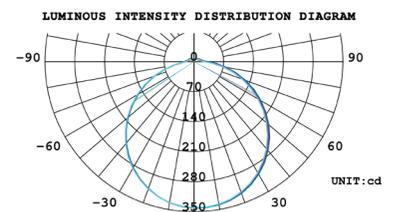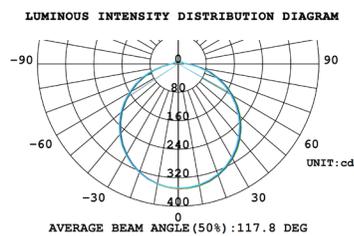

## 1 Description

Cat no.	LPRD023KWE & LPSQ023KWE
lumen package	1150 lm
CCT	3000K
Supply Voltage	230-240V ~ 50Hz
Driver with Plug Lead Supplied	Yes
Input Power	12W
Power Factor	0.9
Efficacy	95 lm/W
Colour Rendering Index (CRI)	80+
Beam Angle	120°
Lifespan	30,000hrs
Dimming	Yes Dimmable With Trailing Edge Dimmers
Appliance Class	Class III Construction
Insulation Rating	IC-F & IC-4
IP Rating	IP44
Ceiling Cutout	Ø120mm
Warranty	3yrs

## 2 Advantages of LED

- High efficiency (up to 80% energy saving)
- Instant 'ON'
- Long life when compared with traditional incandescent/halogen filament lamps

There is a lot of incorrect information about LED lamp life in the market today. The lamp life of LED lamps is determined by many factors; Voltage and Environmental conditions, etc. The most important factor that determines a LED lamp life is the OPERATING TEMPERATURE. It is important to know that the LED Lamp Operating Temperature is a factor that you as the customer have a degree of control over, by instructing the Electrical Contractor who is installing your fitting, about the installation type you require. (Please see diagrams below) Operating Temperature significantly determines the life of an LED lamp or LED

fixture. Most LED lamps from reputable suppliers state a Rated Average Lamp Life at 25°C ambient temperature.

Therefore at HPM we would like to give you as much information as possible when installing your LED Downlight Kits# to get the best results.

Below you will see an example of how different types of installation can affect the operating temperature of the LED lamp and the resultant effect this has on the Rated Average Life of the LED Lamp.

### 3 LED Downlight Lamp Life

30,000Hrs


Rated Average Lamp LED Life @25°C when installed with the default insulation clearances specified by AS/NZS 3000

25,000Hrs

Rated Average Lamp LED Life @25°C when installed with the thermal insulation abutting and covering the fixture in accordance with the IC-4 & IC-F rating specified in AS/NZS 60598.2.2 Amendment A (NZ only).



**Note:** This form of installation complies with Wiring Rules AS/NZS 3000.

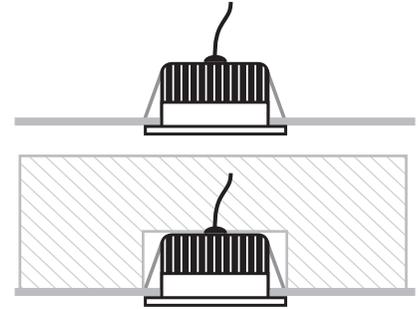


### 4 Dimming

The HPM 10W LED downlights are dimmable\* with Trailing Edge Dimmers Only. We recommend the following Dimmers only for use with HPM LED driver (HPMD001).

Legrand Excel Life EM400A3P	Max. 8 per EM400A3P	Dimming Range 100%-10%
Legrand Excel Life EM250T	Max. 5 per EM250T	Dimming Range 100%-10%
Legrand Excel Life EM400T	Max. 8 per EM400T	Dimming Range 100%-10%
Legrand Arteor AR400T	Max. 8 per AR400T	Dimming Range 100%-10%
Legrand Arteor AR400A3P	Max. 8 per AR400A3P	Dimming Range 100%-10%
HPM 250T	Max. 5 per 250T	Dimming Range 100%-10%
HPM 400T	Max. 8 per 400T	Dimming Range 100%-10%
HPM 700T	Max. 14 per 700T	Dimming Range 100%-15%
HPM 1000T	Max. 20 per 1000T	Dimming Range 100%-15%

### 5 Insulation Rating




This series of downlights has achieved an IC-4 & IC-F insulation rating in accordance with AS/NZ 60598.2.2.

A type IC-4 & IC-F, recessed luminaire can be installed with building insulation material that can safely be exposed continuously to temperatures up to 90°C. Such insulation can cover and abut the side of the luminaire.

Refer to diagram for clarification.

**Note: LED driver can be placed under insulation, however the driver's lifespan will be affected and the warranty made void. Not suitable for use with loose-fill insulation. If installed in accordance with the IC-4 & IC-F rating, insulation shall have a minimum temperature rating of 90°C.**

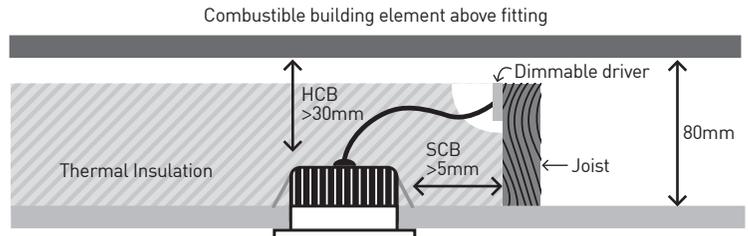

**Risk of FIRE** - Required clearance from structural members and building elements  
SCB = 5mm HCB = 30mm

**SCB - Side Clearance to Building element:** Minimum distance between the side of the recessed luminaire and any building element.  
**HCB - Height Clearance to Building element:** Minimum distance between the top of the recessed luminaire and any building element above it.

\* Dimmable only with the Trailing Edge Dimmer Types listed above. Using the HPMD001 series Driver with any dimmer type not specified, will result in poor performance and reduced life.  
^ Lumen values quoted are typical and can vary at different colour temperatures and between manufacturers.  
# Installation must be by a Registered Electrical Contractor.

#### Warranty

Legrand warrants this product for a period of 3 years from the date of purchase. These goods come with guarantees that cannot be excluded under the Australian and New Zealand Consumer Laws. You are entitled to a replacement or a refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired if the goods fail to be acceptable quality and the failure does not amount to a major failure. See the Warranty card enclosed with this product for further details.

#### Customer Service

For all Customer Service and Technical Support please call Monday to Friday during business hours.

Legrand Australia  
1300 369 777  
www.hpm.com.au

Legrand New Zealand  
0800 476 009  
www.hpm.co.nz

ABN: 31 000 102 661