


Mobile Product 3 Port Wall Charger Instruction Manual

Cat. D1233TC

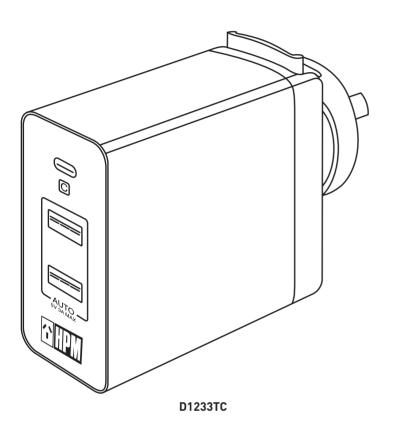

Product Specifications:

Cat No: D1233TC

Input: AC 100-240V 50/60Hz 1.2A Output 1: DC 5-20V 3A (MAX) Output 2-3: DC 5V 3A (MAX)

Power: 45W (MAX) Stand by power: 0.1W Size: 69 x 67 x 32mm Weight: 135g


Package Content:


- 1. Wall Charger
- 2. USB-C charging cable
- 3. Instruction manual

Product Features:

- 1. Fast charging with up to 45W of power
- 2. Perfect solution for USB-C laptops and other devices using USB-C Power Delivery 2.0
- 3. Ability to power USB-C and USB Type A devices simultaneously
- 4. Worldwide use with AC input 100-240V
- 5. Multiple safety protections over current, voltage, short circuit and temperature protection
- 6. Compatible with Quick Charge 2.0 specifications

Product Diagram





Operation Instructions:

Caution: This products rated 45W. If the used power exceeds 45W, the Wall Charger will switch to Overload protection mode and 'SHUT DOWN'. When the Wall Charger is re-plugged to the socket and connection is restored, if the load is within 45W, it will resume to normal operation.

Product Notes:

- This product must be used as per these instructions.
- For indoor use only.
- Please check that this product's connector sockets and voltage are compatible with your devices' in accordance with their instruction manuals.
- Always check for any damage on cord or connectors before use. Using damaged cords may lead to electric shock or fire.
- This product should not be used in areas exposed to constant vibration, temperature fluctuations, or areas of high humidity.
- This product contains no serviceable parts and no attempt should be made to repair this product. If the product is faulty it should be discarded.
- This product has been designed to operate in ambient temperatures 5°C to 25°C occasionally reaching 35°C.
- This product is only suitable for information technology equipment.
- This product must be used in well ventilated area. Do not operate the charger in a bag or inside a closet or any closed space.
- Do not apply excessive force on the cord while in use.
- Do no place any object on the cord while in use.
- Do not unplug connectors by pulling the cord.
- Do not place the device and cord close to heating elements.
- The material in this product may vary in colour from batch to batch. Colour matching from one batch to another cannot be guaranteed.
- This product must be cleaned only with a dry soft cloth. Avoid using any wet medium for cleaning.
- Keep the charger out of reach of children.
- Electrical installations periodically receive transient over voltages. This product has been designed to minimise the effect of such voltages on connected equipment. It may not give full protection for extreme over voltage transients such as those resulting from a close lighting strike.
- This product has been designed to operate on a nominal supply voltage of 100- 240V ~ +/- 6% 50/60 Hz
- This product utilises intellectual property in the form of registered designs, trademarks, and/or patents. Such intellectual property remains the property of Legrand in all cases
- Legrand reserves the right to modify the specification of this product at any time.

Warranty

Legrand Australia Pty Ltd will honour all statutory guarantees that you as a consumer are entitled to rely upon under the Australian and New Zealand Consumer Laws against a manufacturer, including a guarantee that this product is of acceptable quality.

To make a claim under any statutory guarantee you should first contact the supplier, or retailer from whom you purchased this product.

Customer Service

For all Customer Service and Technical Support please call Monday to Friday during business hours

Legrand Australia 1300 369 777 www.hpm.com.au

Legrand New Zealand 0800 476 009 www.hpm.co.nz

ABN: 31 000 102 661

10_2018