# Datasheet

SERENE AC CEILING FAN WITH LIGHT-1220MM, 48" CAT. NO. CF12AC4BLEDWE



A brand of **Degrand**°







Low110204500Medium165357200High230709480

Power

(Watts)

Airflow (m<sup>3</sup>/h)

\*RPM: Rotations Per Minute

Fan Speed

# **PRODUCT SPECIFICATIONS**

RPM\*

Cat. No.	CF12AC4BLEDWE		
Colour/Finish	White		
Supply Voltage	230-240 V ~ 50 Hz		
LIGHT			
Light Type	Integrated Tri-Colour CCT (Correlated Colour Temperature)		
LED Light Tri-colour Range	1250 lumens 3,000K (Warm White) 1400 lumens 4,000K (Cool White) 1290 lumens 5,700K (Natural White)		
Light Dimming	Dimmable with compatible wall dimmer, not dimmable by remote control		
Light Wattage	16 W		
Maximum Efficacy	88 lm/W		
Colour Rendering Index (CRI)	80+		
CEILING FAN			
Motor Type	AC (Alternate Current)		
Maximum Power	70 W		
Maximum RPM	230 RPM		
Maximum Airflow	9480 m <sup>3/</sup> h		
Blade Pitch	11.5°		
Body and Canopy Construction	ABS plastic (rust free^)		
Blade Material	ABS plastic (rust free^)		
Blade Size	1220 mm, 48"		
Number of Blades	4		
Ceiling Install	Hang sure canopy mounting (slope up to 18°)		
Recommended Height	There should be at least 2.1 m between the lowest point of the ceiling fan blades and the floor		
Wall Control	Legrand Excel Life rotary 3 speed fan controller with light switch on 2 gang plate (ED3FCSERLWE)		
Remote Control	HPM 3 Speed Fan Controller (CFSERACREMOTE - sold separately)		
Includes	Motor assembly, 4 x ABS plastic blades, screw pack, fan wall control, light Switch, mounting bracket, instruction manual		

^Body, canopy and blades are made from ABS plastic, rust free does not apply to the metal downrod.

# Datasheet SERENE AC CEILING FAN WITH LIGHT-1220MM, 48" CAT. NO. CF12AC4BLEDWE



A brand of Liegrand

## FEATURES AND BENEFITS


- Powerful 70 W AC motor.
- 16 W dimmable LED light tri-colour with a maximum of 1400 lumens.
- Integrated LED light boasts a long lifespan and provides an even spread of the light distribution.
- LED light tri-colour switch lets you easily select your own light colour temperature between warm white, cool white and natural white.
- ABS plastic ceiling fans are suitable for indoor or undercover outdoor areas not exposed to the weather.
- Body, canopy and blades are made from ABS plastic, making them rust free^.
- Moulded ABS plastic blades for high strength and durability, which are easy to clean.
- Pre-wired replaceable downrods for easy height extension, available in 750 mm and 1500 mm lengths.
- Coastal rated to withstand water damage due to salt found in the air.
- Fast connect wiring system and quick-fit blades system for ease and reduction of installation time.
- Reversible summer and winter mode to save energy for use all year round.
- Sleek and modern ceiling fan design with curvaceous blades to compliment any space.
- $\blacksquare$  3 speed wall controller with light switch included for ease of operation.
- ^ Rust free does not apply to the metal downrod.

#### HOW TO CHOOSE THE RIGHT CEILING FAN SIZE

Room size (m²)	Up to 7 m <sup>2</sup> 7 m <sup>2</sup> to 13 m <sup>2</sup>		13 m² to 20 m²
Recommended Fan Size (mm)	920 mm to 1220 mm	1220 mm to 1320 mm	1320 mm to 1420 mm
Recommended Fan Size (inches)	36" or 48"	48 " or 52"	52" or 56"

## **REGULATION REQUIREMENT**

The Australia & New Zealand standard implies that the lowest point of the fan blades must be installed at least 2.1 m from the floor and the blades at least 300 mm from the nearest wall.

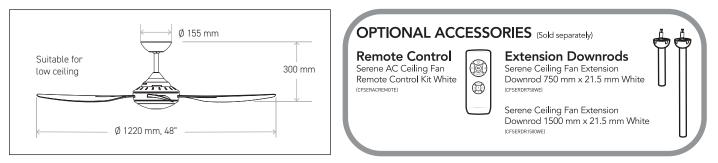

## SHIPPING

Single Product					
Cat. No.	Barcode	Packaging Dimensions (mm)	Product Weight (kg)		
CF12AC4BLEDWE	9321001516224	595 x 330 x 317	5.6		

Legrand - Australia 1300 369 777 www.hpm.com.au ABN 31 000 102 661 Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing. LE14559AA

Please note: specifications are subjected to change without prior notice.



Legrand - New Zealand 0800 476 009 www.hpm.co.nz