


Datasheet

DLI LED Dimmable Downlight 5W to 7W, IP44

CAT NO. DLI7001, DLI7002, DLI7003, DLI7003BL, DLI7004, DLI7004BL, DLI9001, DLI9002, DLI9003, DLI9003BL, DLI9004, DLI9004BL DLI12501, DLI12502



A brand of **legrand**



DLI70 Series (Black DLI7003BL)

DLI70 Series

DLI90 Series

DLI125 Series

Cat no.	Description	Ceiling cut-out	Wattage	Ceiling depth	Fascia size	Lumens	Colour temp	Beam angle	CRI	IP rating
DLI7001	Warm white / white finish	70mm Ø	5W	66mm	94mm Ø	505lm	3000K	90°	80+	IP44
DLI7002	Cool white /white finish	70mm Ø	5W	66mm	94mm Ø	515lm	4000K	90°	80+	IP44
DLI7003	Warm white / brushed chrome finish	70mm Ø	5W	66mm	94mm Ø	505lm	3000K	90°	80+	IP44
DLI7003BL	Warm white / Black finish	70mm Ø	5W	66mm	94mm Ø	505lm	3000K	90°	80+	IP44
DLI7004	Cool white / brushed chrome finish	70mm Ø	5W	66mm	94mm Ø	515lm	4000K	90°	80+	IP44
DLI7004BL	Cool white / Black finish	70mm Ø	5W	66mm	94mm Ø	515lm	4000K	90°	80+	IP44
DLI9001	Warm white / white finish	90mm Ø	7W	70mm	110mm Ø	700lm	3000K	85°	80+	IP44
DLI9002	Cool white / white finish	90mm Ø	7W	70mm	110mm Ø	820lm	4000K	85°	80+	IP44
DLI9003	Warm white / brushed chrome finish	90mm Ø	7W	70mm	110mm Ø	700lm	3000K	85°	80+	IP44
DLI9003BL	Warm white / Black finish	90mm Ø	7W	70mm	110mm Ø	700lm	3000K	85°	80+	IP44
DLI9004	Cool white / brushed chrome finish	90mm Ø	7W	70mm	110mm Ø	820lm	4000K	85°	80+	IP44
DLI9004BL	Cool white / Black finish	90mm Ø	7W	70mm	110mm Ø	820lm	4000K	85°	80+	IP44
DLI12501	Warm white / white finish	125mm Ø	7W	76mm	150mm Ø	750lm	3000K	90°	80+	IP44
DLI12502	Cool white / white finish	125mm Ø	7W	76mm	150mm Ø	880lm	4000K	90°	80+	IP44


DLI LED Dimmable Downlight 5W to 7W, IP44

CAT NO. DLI7001, DLI7002, DLI7003, DLI7003BL, DLI7004, DLI7004BL, DLI9001, DLI9002,

DLI9003, DLI9003BL, DLI9004, DLI9004BL DLI12501, DLI12502



A brand of **legrand®**

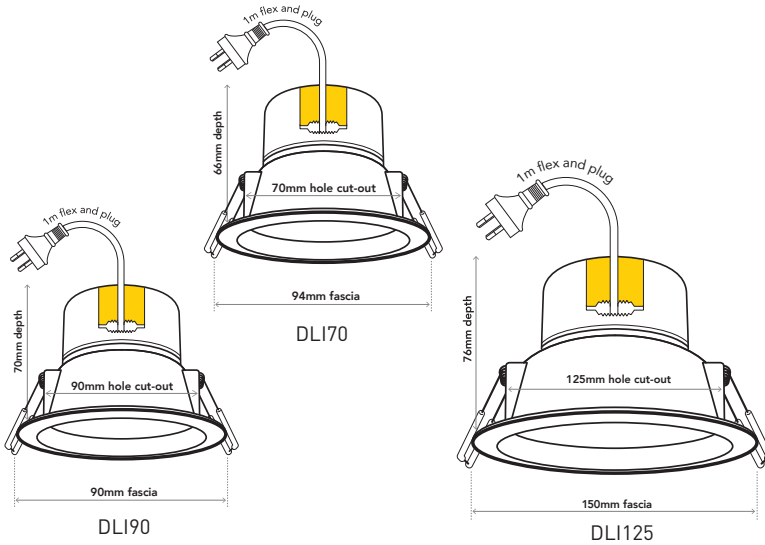

- Integrated dimmable driver compatible with trailing edge dimmers
- Smooth dimming range
- Suitable for 70mm, 90mm and 125mm hole cut-outs
- Only 5W to 7W power consumption
- Up to 880 lumens output
- Maximum efficacy up to 125lm/W
- Insulation Contact - Fire Resistant (IC-F) recessed luminaire: An IC-F rated downlight means that building insulation that can be continuously exposed to 90°C, can safely abut and cover the luminaire. Additionally, IC-F rated downlights have to pass a 1mm probe test i.e. a 1mm diameter probe cannot enter any part of the luminaire and in effect no insulation or any other material can enter the fitting
- Fitted with 1m flex and plug
- IP44 weatherproof
- Low ceiling depth
- Suitable for slab canisters
- 35,000h lifespan
- 3 year warranty

Single product			
Cat No	Single Barcode	Dimensions	Weight
DLI7001	9321001455134	100 x 100 x 80mm	220g
DLI7002	9321001455141	100 x 100 x 80mm	220g
DLI7003	9321001455493	100 x 100 x 80mm	220g
DLI7003BL	9321001481270	100 x 100 x 80mm	220g
DLI7004	9321001455509	100 x 100 x 80mm	220g
DLI7004BL	9321001481294	100 x 100 x 80mm	220g
DLI9001	9321001451655	118 x 118 x 90mm	265g
DLI9002	9321001451662	118 x 118 x 90mm	265g
DLI9003	9321001455479	118 x 118 x 90mm	265g
DLI9003BL	9321001481317	118 x 118 x 90mm	265g
DLI9004	9321001455486	118 x 118 x 90mm	265g
DLI9004BL	9321001481331	118 x 118 x 90mm	265g
DLI12501	9321001451679	161 x 161 x 98mm	333g
DLI12502	9321001451686	161 x 161 x 98mm	333g

DLI70 Outer box (Qty 48)			
Cat No	Barcode	Dimensions	Weight
DLI7001	9321001455158	420 x 320 x 345mm	13.5Kg
DLI7002	9321001455165	420 x 320 x 345mm	13.5Kg
DLI7003	9321001455530	420 x 320 x 345mm	13.5Kg
DLI7003BL	9321001481287	420 x 320 x 345mm	13.5Kg
DLI7004	9321001455547	420 x 320 x 345mm	13.5Kg
DLI7004BL	9321001481300	420 x 320 x 345mm	13.5Kg

DLI90, DLI125 Outer box (Qty 24)			
Cat No	Barcode	Dimensions	Weight
DLI9001	9321001451693	495 x 250 x 300mm	8.5Kg
DLI9002	9321001451709	495 x 250 x 300mm	8.5Kg
DLI9003	9321001451693	495 x 250 x 300mm	8.5Kg
DLI9003BL	9321001481324	495 x 250 x 300mm	8.5Kg
DLI9004	9321001455516	495 x 250 x 300mm	8.5Kg
DLI9004BL	9321001481348	495 x 250 x 300mm	8.5Kg
DLI12501	9321001455523	670 x 340 x 325mm	11.5Kg
DLI12502	9321001451723	670 x 340 x 325mm	11.5Kg

Legrand - AUS
1300 369 777
www.hpm.com.au
ABN 31 000 102 661

Legrand - NZ
0800 476 009
www.hpm.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.