




# QUICK-FIT CEILING FANS

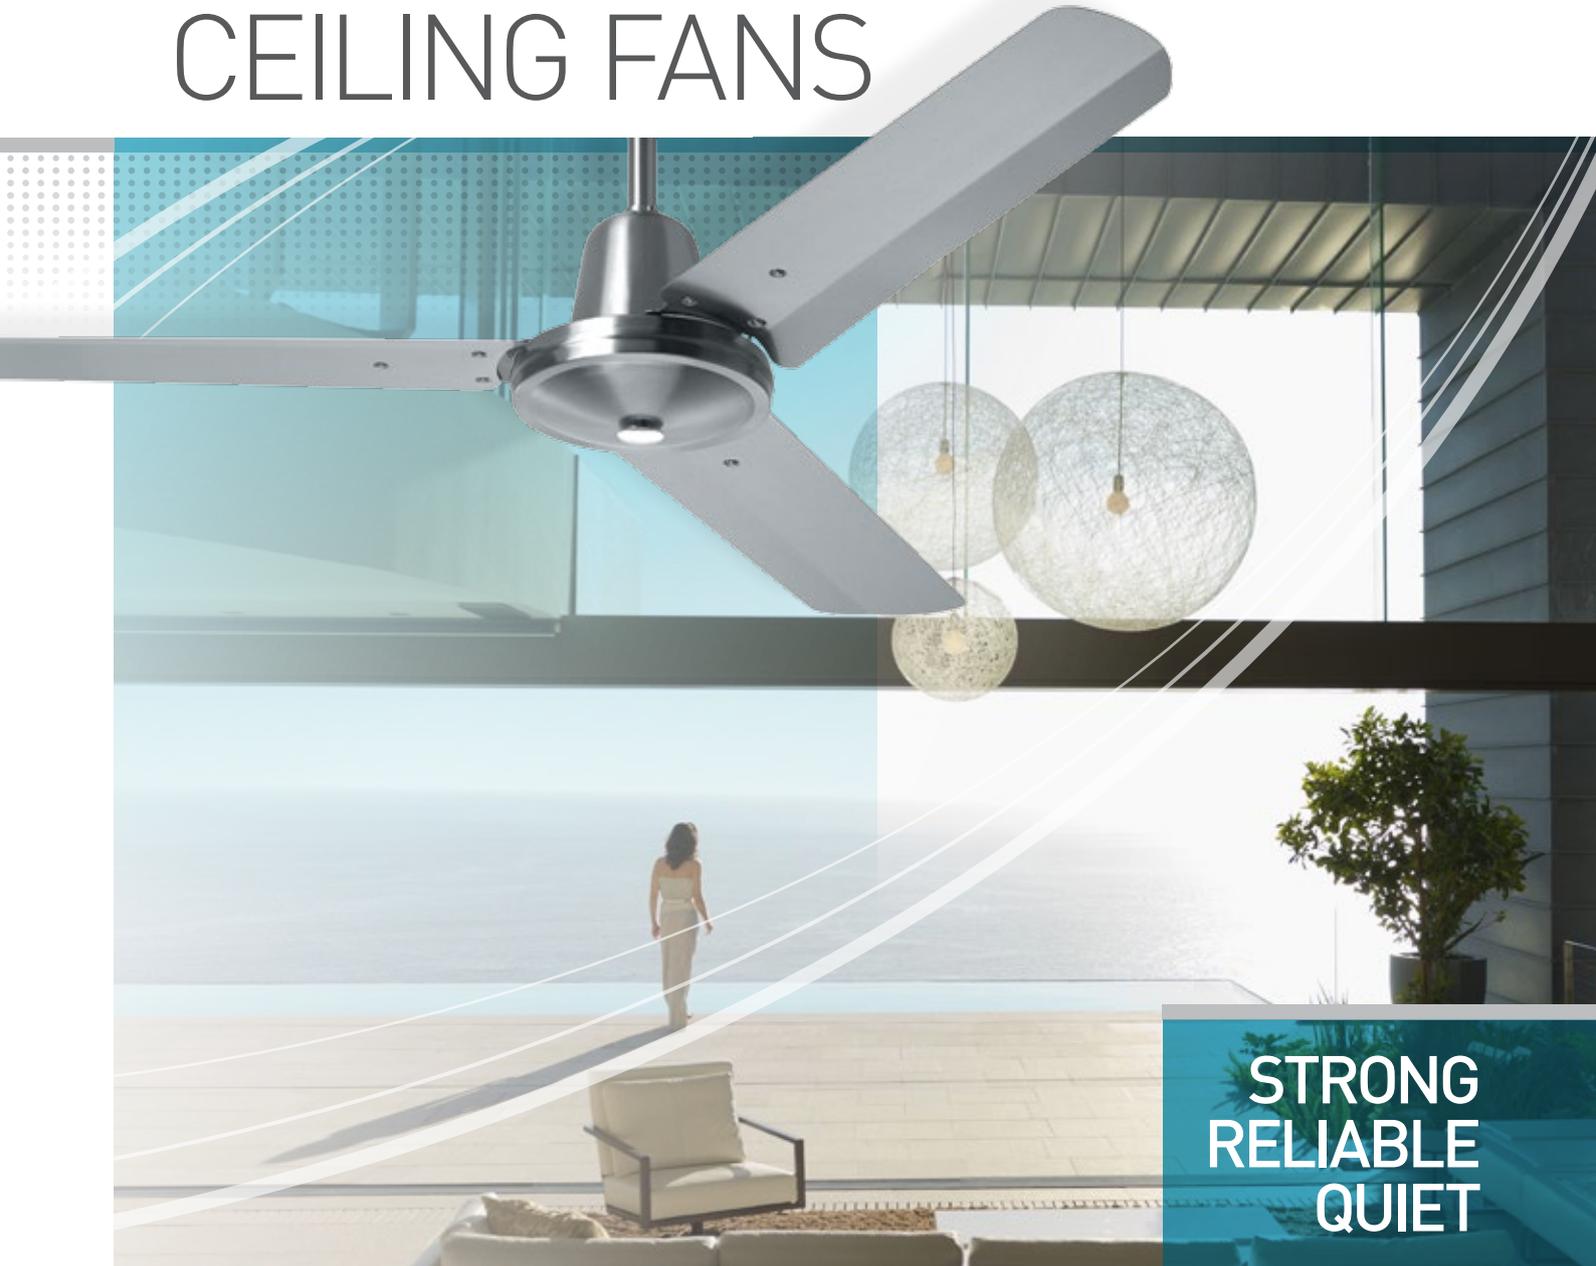

**STRONG  
RELIABLE  
QUIET**

# CLASSIC STREAMLINE DESIGN

We believe fans should be designed to be timeless and discreet.



WHETHER YOU'RE IN THE TROPICS, THE OUTBACK, THE SUBURBS, OR REMOTE NEW ZEALAND, WE WANT TO KEEP YOU COOL AND COMFORTABLE WITHOUT COSTING YOU A FORTUNE.

So we've designed and engineered our fans in Australia to provide maximum performance for minimum energy consumption. We've also focused on making them easier to install.

**Simple, reliable and good value for money; you can't beat that.**



**QUICK-FIT WIRING**  
for super fast installation.  
No need to bring up the fan  
on the ladder



**REMOTE CONTROL**  
compatible with all models.  
Perfect for retrofit installations



**QUICK-FIT BLADES**  
for less hassle and rapid fit-off



**MAXIMUM AIRFLOW**  
enables maximum cooling  
whilst maintaining quiet  
operation



**PRE-WIRED REPLACEABLE  
DOWNRODS** for easy extension



**LIGHT ADAPTABLE**  
for convenience and  
space-saving




**HANG-SURE & J-HOOK MODELS**  
for level and inclined ceilings



**AUSTRALIAN DESIGNED  
& ENGINEERED** for quality  
guaranteed

# FEATURES OVERVIEW

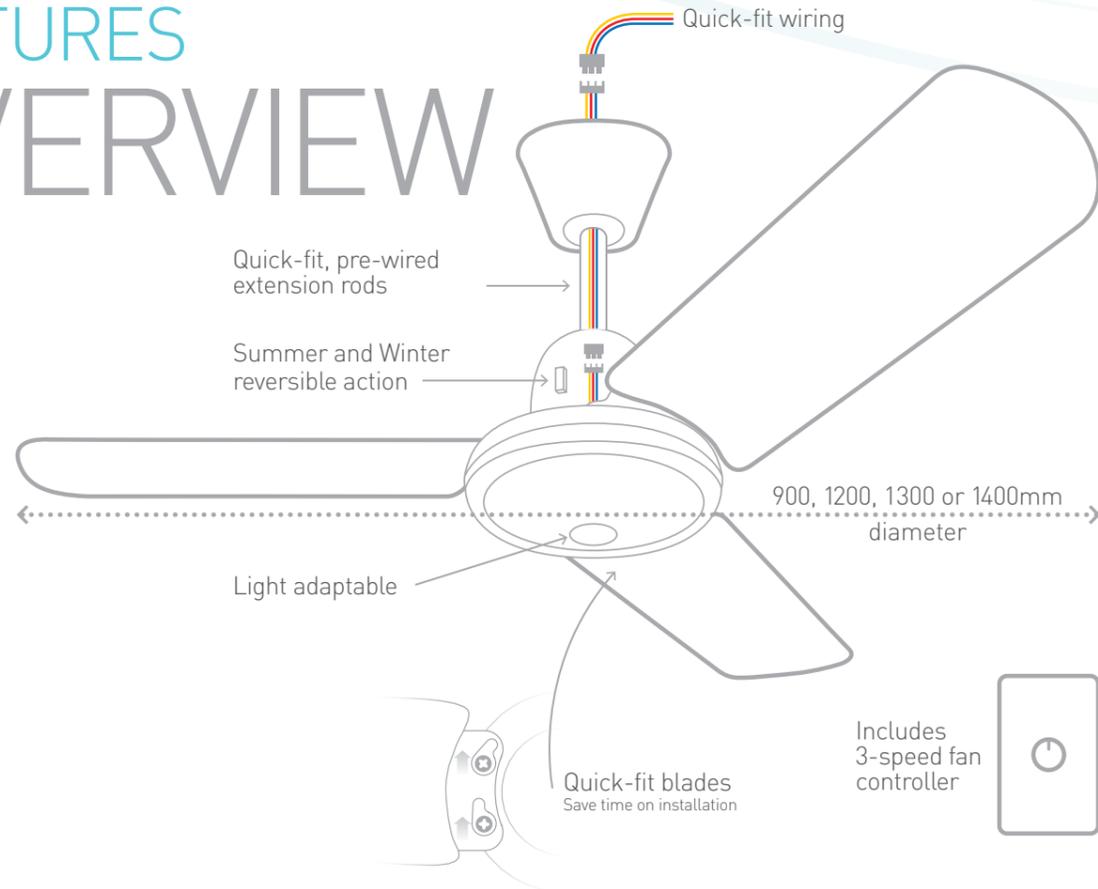


# GUIDE TO CHOOSING THE RIGHT FAN

Room dimension	Up to 12m <sup>2</sup>	12 – 27m <sup>2</sup>	27+m <sup>2</sup>
Suggested fan size	900mm	1200mm	1400mm

# SUMMER & WINTER MODES EXPLAINED

WE'VE ADDED A SIMPLE TOGGLE SWITCH ON ALL OUR FANS SO IT'S EASY TO SWITCH BETWEEN SUMMER MODE FOR THE WARMER MONTHS AND WINTER MODE FOR THE COOLER MONTHS. THIS OPTIMISES THE FAN'S PERFORMANCE AND INCREASES COMFORT.

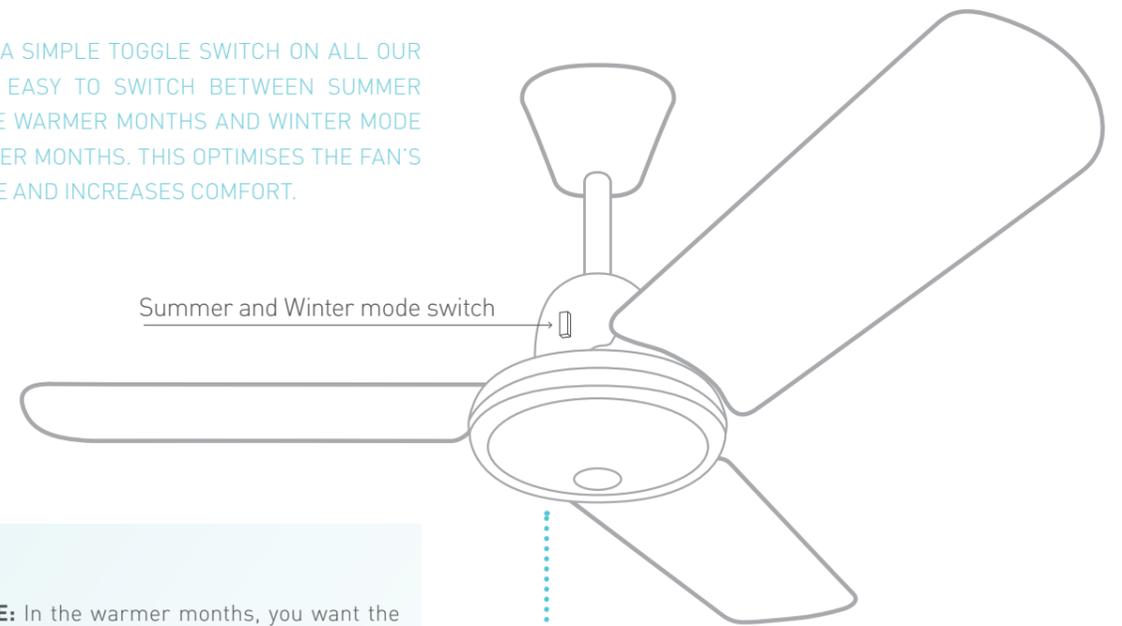

**HANG-SURE MOUNTING**  
Suitable for all ceiling types including inclined ceilings up to a 20° angle

**J-HOOK MOUNTING**  
Suitable for level ceiling only

## OPTIONAL ACCESSORIES

### REMOTE CONTROL KIT\* (CFREMOTEJ / CFREMOTEH)

- 2, 4 & 6 hour timer
- Low, Med & High fan speed
- Low, Med & High light
- Compatible with all models
- Wall bracket included



### OYSTER LIGHT KIT (CFOLWE / CFOLBS)

- Available in White (WE) and Brushed Stainless Steel (BS)
- Compatible with the entire range
- Easy fit-off  
(Note: globe not included)



### CLIPPER LIGHT KIT (CFCLWE / CFCLBS)

- Available in White (WE) and Brushed Stainless Steel (BS)
- Compatible with the entire range
- Easy fit-off  
(Note: globe not included)



**SUMMER MODE:** In the warmer months, you want the blades to rotate clockwise to push cool air down. This creates a wind chill effect and evaporates perspiration from skin to keep everyone comfortable.



**WINTER MODE:** In the cooler months, you want the blades to rotate counter-clockwise at a low speed to pull air up. A gentle updraft will push warm air, which naturally rises to the ceiling, down along the walls to the floor to keep everyone snug.



### ENERGY-SAVING TIP

By optimising air flow, ceiling fans can significantly reduce air-conditioning and heating bills.

\*Coming soon. Check availability 1300 369 777

# 316 Marine Grade Stainless Steel SERIES



## FEATURES

- FULL 316 marine grade stainless steel construction (body, blades, screws, brackets etc.) for the best corrosion resistance
- 3 blades
- Motor: 65W
- Mounting Options:  
Hang-sure - inclined and level ceilings  
J-Hook - level ceiling only
- Quick-fit wiring for super fast installation
- Quick-fit blades
- Light adaptable – oyster and clipper light kits available
- Light adaptable
- Reversible operation for Summer and Winter
- Heavy-duty sealed bearings
- Includes 3-speed Excel Life white fan controller
- Compatible with remote control CFREMOTEJ (J-Hook) & CFREMOTEH (Hang-sure)
- 3 year warranty

**ALL EXPOSED COMPONENTS MADE OF 316 MARINE GRADE STAINLESS STEEL**  
This ensures total resistance to harsh environments (eg. humidity, salinity) Perfect for homes in coastal areas and alfresco dining areas.

## RECOMMENDED ACCESSORIES

### Remote Control Kit



CFREMOTEH (Hang-sure)  
CFREMOTEJ (J-Hook)

### Grid & Plate



ED770/2GPLWE

### Dimmer



EM400A3PWE

Recommended when using light kits - insert the fan controller (included in box with fan) and dimmer mechanism in one plate.

## PERFORMANCE

Cat No	Fan Speed	RPM [Rotations per Minute]	Power [Watts]	Airflow [m <sup>3</sup> /H]
1200mm CF12J316L (J-Hook) & CF12H316L (Hang-sure)	Low	150	13	2,940
	Medium	260	33	6,720
	High	320	60	10,020
1400mm CF14J316L (J-Hook) & CF14H316L (Hang-sure)	Low	115	13.2	3,480
	Medium	210	33.5	7,800
	High	280	60	11,040

# 304 Stainless Steel SERIES




**GUIDE TO STAINLESS STEEL GRADE**  
 316 SERIES: Best  
 304 SERIES: Great  
 430 SERIES: Good

## FEATURES

- Quick-fit 304 stainless steel blades for great corrosion resistance
- 3 blades
- Motor: 65W
- Mounting Options:  
 Hang-sure - inclined and level ceilings  
 J-Hook - level ceiling only
- Quick-fit wiring for super fast installation
- Light adaptable – oyster and clipper light kits available
- Reversible operation for Summer and Winter
- Heavy-duty sealed bearings
- Includes 3-speed Excel Life white fan controller
- Compatible with remote control CFREMOTEJ (J-Hook) & CFREMOTEH (Hang-sure)
- 3 year warranty

## RECOMMENDED ACCESSORIES

**Clipper Light Kit**



190mm x 111mm

CFCLBS  
[Brushed Stainless Steel]

**Oyster Light Kit**



245mm x 90mm

CFOLBS  
[Brushed Stainless Steel]

**Remote Control Kit**



CFREMOTEH (Hang-sure)  
CFREMOTEJ (J-Hook)

**Grid & Plate**



ED770/2GPLWE

**Dimmer**



EM400A3PWE

Recommended when using light kits - insert the fan controller (included in box with fan) and dimmer mechanism in one plate.

## PERFORMANCE

Cat No	Fan Speed	RPM [Rotations per Minute]	Power [Watts]	Airflow [m <sup>3</sup> /H]
1200mm CF12J304 (J-Hook) & CF12H304 (Hang-sure)	Low	150	13	2,940
	Medium	260	33	6,720
	High	320	60	10,020
1400mm CF14J304 (J-Hook) & CF14H304 (Hang-sure)	Low	115	13.2	3,480
	Medium	210	33.5	7,800
	High	280	60	11,040

# 430 Stainless Steel SERIES



## FEATURES

- Quick-fit 430 stainless steel blades for good corrosion resistance
- 3 blades
- Motor:  
55W (900mm)  
65W (1200 & 1400mm)
- Mounting Options:  
Hang-sure - inclined & level ceilings  
J-Hook - level ceiling only
- Quick-fit wiring for super fast installation
- Light adaptable - oyster and clipper light kits available
- Reversible operation for Summer and Winter
- Heavy-duty sealed bearings
- Includes 3-speed Excel Life white fan controller
- Compatible with remote control CFREMOTEJ (J-Hook) & CFREMOTEH (Hang-sure)
- 3 year warranty

## RECOMMENDED ACCESSORIES

**Clipper Light Kit**



190mm x 111mm

CFCLBS  
(Brushed  
Stainless Steel)

**Oyster Light Kit**



245mm x 90mm

CFOLBS  
(Brushed  
Stainless Steel)

**Remote Control Kit**



CFREMOTEH  
(Hang-sure)  
CFREMOTEJ  
(J-Hook)

**Grid & Plate**



ED770/2GPLWE

**Dimmer**



EM400A3PWE

Recommended when using light kits - insert the fan controller (included in box with fan) and dimmer mechanism in one plate.

## PERFORMANCE

Cat No	Fan Speed	RPM (Rotations per Minute)	Power (Watts)	Airflow (m <sup>3</sup> /H)
900mm CF9JBS (J-Hook) & CF9HBS (Hang-sure)	Low	160	7	1,500
	Medium	260	13.5	2,800
	High	360	46	4,920
1200mm CF12JBS (J-Hook) & CF12HBS (Hang-sure)	Low	150	13	2,940
	Medium	260	33	6,720
	High	320	60	10,020
1400mm CF14JBS (J-Hook) & CF14HBS (Hang-sure)	Low	115	13.2	3,480
	Medium	210	33.5	7,800
	High	280	60	11,040

# Aluminium SERIES



**WHY 3 OR 4 BLADE?**  
This is a question of aesthetic preference. Both 3 and 4 blade fans perform equally well.


## FEATURES

- Quick-fit white aluminium blades
- 3 and 4 blade options
- Motor:  
55W (900mm)  
65W (1200 & 1400mm)
- Mounting Options:  
Hang-sure - inclined & level ceilings  
J-Hook - level ceiling only
- Quick-fit wiring for super fast installation
- Light adaptable – oyster and clipper light kits available
- Reversible operation for Summer and Winter
- Heavy-duty sealed bearings
- Includes 3-speed Excel Life white fan controller
- Compatible with remote control CFREMOTEJ (J-Hook) & CFREMOTEH (Hang-sure)
- 3 year warranty

## PERFORMANCE

Cat No	Fan Speed	RPM [Rotations per Minute]	Power [Watts]	Airflow [m <sup>3</sup> /H]	
<b>3 BLADE FANS</b>					
900mm	CF9JWE (J-Hook) & CF9HWE (Hang-sure)	Low	160	7	1,500
		Medium	260	13.5	2,800
		High	360	46	4,920
1200mm	CF12JWE (J-Hook) & CF12HWE (Hang-sure)	Low	150	13	2,940
		Medium	260	33	6,720
		High	320	60	10,020
1400mm	CF14JWE (J-Hook) & CF14HWE (Hang-sure)	Low	115	13.2	3,480
		Medium	210	33.5	7,800
		High	280	60	11,040
<b>4 BLADE FANS</b>					
1200mm	CF12J4WE (J-Hook) & CF12H4WE (Hang-sure)	Low	125	13	3,000
		Medium	220	33	6,360
		High	290	61.5	10,800
1400mm	CF14J4WE (J-Hook) & CF14H4WE (Hang-sure)	Low	105	13	3,360
		Medium	185	33	7,800
		High	255	62	11,880

## RECOMMENDED ACCESSORIES



**Clipper Light Kit**  
CFCLWE (White)



**Oyster Light Kit**  
CFOLWE (White)



**Remote Control Kit**  
CFREMOTEH (Hang-sure)  
CFREMOTEJ (J-Hook)



**Grid & Plate**  
ED770/2GPLWE



**Dimmer**  
EM400A3PWE

Recommended when using light kits - insert the fan controller (included in box with fan) and dimmer mechanism in one plate.

# Rattan

## SERIES



### RATTAN

A perfect complement to traditional and country style homes.

### RECOMMENDED ACCESSORIES

#### Clipper Light Kit



CFCLWE  
(White)

#### Oyster Light Kit



CFOLWE  
(White)

#### Remote Control Kit



CFREMOTEH  
(Hang-sure)  
CFREMOTEJ  
(J-Hook)

#### Grid & Plate



ED770/2GPLWE

#### Dimmer



EM400A3PWE

Recommended when using light kits - insert the fan controller (included in box with fan) and dimmer mechanism in one plate.

### FEATURES

- Quick-fit white timber and rattan blades
- 4 blades
- Motor: 65W (1300mm)
- Mounting Options: Hang-sure - inclined & level ceilings
- Quick-fit wiring for super fast installation
- Light adaptable – oyster and clipper light kits available
- Reversible operation for Summer and Winter
- Heavy-duty sealed bearings
- Includes 3-speed Excel Life white fan controller
- Compatible with remote control CFREMOTEJ (J-Hook) & CFREMOTEH (Hang-sure)
- 3 year warranty

### PERFORMANCE

Cat No	Fan Speed	RPM [Rotations per Minute]	Power [Watts]	Airflow [m <sup>3</sup> /H]
CF13HAW	Low	85	13	1,530
	Medium	150	33	4,800
	High	200	61.5	7,800

# Range OVERVIEW

# Accessories

Cat No	Diameter (mm)	Mounting	Finish	Blades	Maximum Airflow (m³/H)	RPM High / Medium / Low
--------	---------------	----------	--------	--------	------------------------	-------------------------

## 316 MARINE GRADE STAINLESS STEEL SERIES

CF12H316L	1200	Hang-sure	FULL MARINE GRADE 316 STAINLESS STEEL	3	10,020	H320, M260, L150
CF12J316L	1200	J-Hook	FULL MARINE GRADE 316 STAINLESS STEEL	3	10,020	H320, M260, L150
CF14H316L	1400	Hang-sure	FULL MARINE GRADE 316 STAINLESS STEEL	3	11,040	H280, M210, L115
CF14J316L	1400	J-Hook	FULL MARINE GRADE 316 STAINLESS STEEL	3	11,040	H280, M210, L115

## 304 STAINLESS STEEL SERIES

CF12H304	1200	Hang-sure	304 STAINLESS STEEL	3	10,020	H320, M260, L150
CF12J304	1200	J-Hook	304 STAINLESS STEEL	3	10,020	H320, M260, L150
CF14H304	1400	Hang-sure	304 STAINLESS STEEL	3	11,040	H280, M210, L115
CF14J304	1400	J-Hook	304 STAINLESS STEEL	3	11,040	H280, M210, L115

## 430 STAINLESS STEEL SERIES

CF9HBS	900	Hang-sure	430 STAINLESS STEEL	3	4,920	H360, M260, L160
CF9JBS	900	J-Hook	430 STAINLESS STEEL	3	4,920	H360, M260, L160
CF12HBS	1200	Hang-sure	430 STAINLESS STEEL	3	10,020	H320, M260, L150
CF12JBS	1200	J-Hook	430 STAINLESS STEEL	3	10,020	H320, M260, L150
CF14HBS	1400	Hang-sure	430 STAINLESS STEEL	3	11,040	H280, M210, L115
CF14JBS	1400	J-Hook	430 STAINLESS STEEL	3	11,040	H280, M210, L115

## ALUMINIUM SERIES

CF9HWE	900	Hang-sure	WHITE	3	4,920	H360, M260, L160
CF9JWE	900	J-Hook	WHITE	3	4,920	H360, M260, L160
CF12HWE	1200	Hang-sure	WHITE	3	10,020	H320, M260, L150
CF12JWE	1200	J-Hook	WHITE	3	10,020	H320, M260, L150
CF12H4WE	1200	Hang-sure	WHITE	4	10,800	H290, M220, L125
CF12J4WE	1200	J-Hook	WHITE	4	10,800	H290, M220, L125
CF14HWE	1400	Hang-sure	WHITE	3	11,040	H280, M210, L115
CF14JWE	1400	J-Hook	WHITE	3	11,040	H280, M210, L115
CF14H4WE	1400	Hang-sure	WHITE	4	11,880	H255, M185, L105
CF14J4WE	1400	J-Hook	WHITE	4	11,880	H255, M185, L105

## RATTAN SERIES

CF13HAW	1300	Hang-sure	RATTAN WHITE	4	7,800	H200, M150, L85
---------	------	-----------	--------------	---	-------	-----------------

## LIGHT KITS

Cat No	Finish	Diameter
CFOLWE	White	245mm
CFOLBS	Brushed Stainless Steel	245mm
CFCLWE	White	190mm
CFCLBS	Brushed Stainless Steel	190mm

## DOWNRODS

Cat No	Mounting	Finish	Length
CFDR750HWE	Hang-sure	White	750mm
CFDR750JWE	J-Hook	White	750mm
CFDR750HBS	Hang-sure	Brushed Stainless Steel	750mm
CFDR750JBS	J-Hook	Brushed Stainless Steel	750mm
CFDR1500HWE	Hang-sure	White	1500mm
CFDR1500JWE	J-Hook	White	1500mm

## REPLACEMENT BLADE SETS

Cat No	Description	Finish
CFBL9WE	Single blade for CF9HWE & CF9JWE	White
CFBL9BS	Single blade for CF9HBS & CF9JBS	430 Stainless Steel
CFBL12WE	Single blade for CF12HWE, CF12JWE, CF12H4WE & CF12J4WE	White
CFBL12BS	Single blade for CF12HBS & CF12JBS	430 Stainless Steel
CFBL14WE	Single blade for CF14HWE, CF14JWE, CF14H4WE & CF14J4WE	White
CFBL14BS	Single blade for CF14HBS & CF14JBS	430 Stainless Steel
CFBL12304	Single blade for CF12H304 & CF12J304	304 Stainless Steel
CFBL14304	Single blade for CF14H304 & CF14J304	304 Stainless Steel
CFBL12316L	Single blade for CF12H316L & CF12J316L	Full marine grade 316 Stainless Steel
CFBL14316L	Single blade for CF14H316L & CF14J316L	Full marine grade 316 Stainless Steel

## REMOTE CONTROL

Cat No	Description
CFREMOTEH	Remote control kit for Hang-sure Ceiling Fans
CFREMOTEJ	Remote control kit for J-Hook Ceiling Fans





**HPM Legrand Australia**

Building 4, Nexus Industry Park  
43-47 Lyn Parade  
Prestons NSW 2170  
1300 369 777  
[www.hpm.com.au](http://www.hpm.com.au)

**HPM Legrand New Zealand**

106 - 124 Target Road  
Glenfield  
Auckland 0627  
0800 476 009  
[www.hpm.co.nz](http://www.hpm.co.nz)