
Data Sheet

IP44 10W Dimmable Sealed LED Downlights Kits

CAT NO. DLS9001, DLS9002, DLS9003, DLS9004



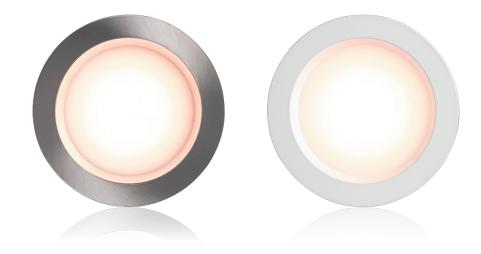

Cat no.	Description	Ceiling Cut-out	Ceiling Depth	Fascia Diameter	Lumens	Colour Temp	Beam Angle	CRI
DLS9001	Sealed White Integrated Downlight 10W LED Warm White with Dimmable Driver	90mm	48mm	110mm	800lm	3000K	90°	>80
DLS9002	Sealed White Integrated Downlight 10W LED Cool White with Dimmable Driver	90mm	48mm	110mm	830lm	4000K	90°	>80
DLS9003	Sealed Brushed Chrome Integrated Downlight 10W LED Warm White with Dimmable Driver	90mm	48mm	110mm	800lm	3000K	90°	>80
DLS9004	Sealed Brushed Chrome Integrated Downlight 10W LED Cool White with Dimmable Driver	90mm	48mm	110mm	830lm	4000K	90°	>80

IP44 10W Dimmable Sealed LED Downlights Kits







Cat No	Single Barcode	Outer Barcode	Gross Weight
DLS9001	9321001431565	9321001431602	650g
DLS9002	9321001431572	9321001431619	650g
DLS9003	9321001431589	9321001431626	650g
DLS9004	9321001431596	9321001431633	650g

- 6-year warranty
- 800-830 lumens
- IC insulation rating: A type IC recessed luminaire can be installed with building insulation material that can safely be exposed continuously to temperatures up to 90°C. Such insulation can cover and abut the side of the luminaire.
- Plug-in unit
- Wide beam angle
- Low profile
- Up to 20 years life span
- IP44
- High efficacy: 80 to 83lm/w

Dimming								
The HPM 10W LED downlights	Legrand Excel Life EM400A3P	grand Excel Life EM400A3P Max. 8 per HPM EM400A3P						
are dimmable* with Trailing Edge Dimmers Only. We recommend the	Legrand Excel Life EM250T	Max. 5 per HPM EM250T	Dimming Range 100%-10%					
following Dimmers only for use	Legrand Excel Life EM400T	Max. 8 per HPM EM400T	Dimming Range 100%-10%					
with HPM LED driver (HPMD001).	Legrand Arteor AR400T	Max. 8 per HPM AR400T	Dimming Range 100%-10%					
	Legrand Arteor AR400A3P	Max. 8 per HPM AR400A3P	Dimming Range 100%-10%					
	HPM 250T	Max. 5 per HPM 250T	Dimming Range 100%-10%					
	HPM 400T	Max. 8 per HPM 400T	Dimming Range 100%-10%					
	HPM 700T	Max. 14 per HPM 700T	Dimming Range 100%-10%					
	HPM 1000T	Max. 20 per HPM 1000T	Dimming Range 100%-10%					

^{*} Dimmable only with the Trailing Edge Dimmer Types listed above. Using the HPMD001 series Driver with any dimmer type not specified, will result in poor performance and reduced life.

HPM Legrand - AUS 1300 369 777 www.hpm.com.au

ABN 31 000 102 661

HPM Legrand - NZ 0800 476 009 www.hpm.co.nz

Refer to your group buying office, HPM Legrand Sales Representative or HPM Legrand Sales Office for pricing.